
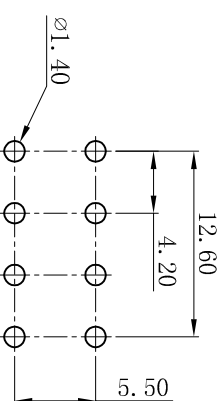
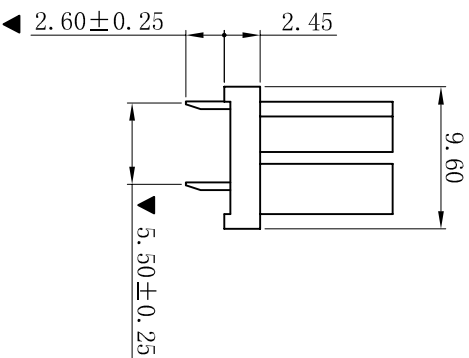



RoHS

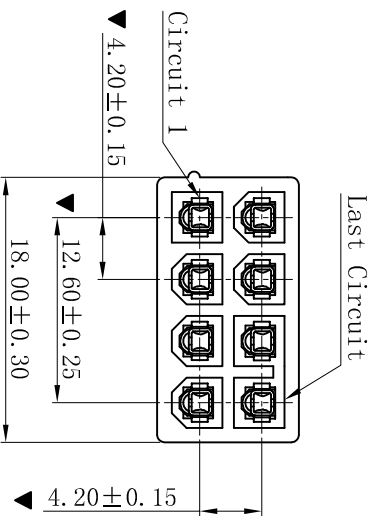

PCB LAYOUT: Component Side  
Recommended PCB Thickness: 1.78mm MAX

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
  - Contact resistance: 20m $\Omega$  max
- WAFER
- Part No. : W4201VTLT-2x04P-SW-T-WL2.6
  - Housing Material: PA66 UL94V-0
  - Pin Material: Phosphor Bronze
  - Contact Area Plating: Matte Tin-Plated
  - The Dimension Marked "▼" Must Be Recorded

更新图面		2019-07-03		2019-07-03		陈雄军		承认	
新版本		2019-05-11		2019-05-11		陈雄军		承认	
说明		日期		日期		承认		承认	
DESCRPTION		DATE:		DATE:		APPRO.		APPRO.	

XYDZ <sup>®</sup> 东莞市祥运连接器有限公司		Dongguan XiangYun Connectors CO., Ltd		品名		Molex 4.20mm 180 $^{\circ}$ 七/八连孔	
Connectors		投影法		(PART NAME)		Wafer Connector Series	
一般公差		MM		料号		W4201VTLT-2x04P-SW-T-WL2.6	
GENERAL TOLERANCE:		1:1		(PART NO)		C	
.00±0.25		A4					
.000±0.05		1/1					
ANGLE: $\pm 1^{\circ}$		版本/Rev					
		B					