
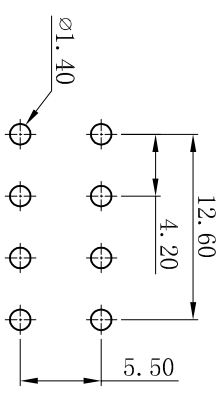
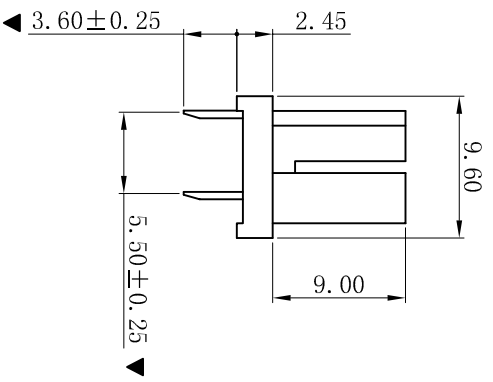



RoHS

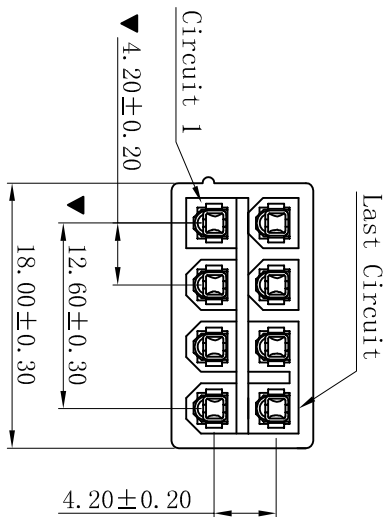

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

- SPECIFICATIONS**
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER**
- Part No.: W4201VTLT-2x04P-SW
 - Poles: 08P
 - Housing Material: PA66 UL94V-0 COLOR NATURA
 - Pin Material: Phosphor Bronze
 - Contact Area Plating: Tin Plating Fog
 - The Dimension Marked “▼” Must Be Recorded

B	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	修订版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
版次	说明	日期	承认	说明
REV.	DESCRIPTION	DATE	APPRO.	DESCRIPTION
1				
2				
3				
4				
5				
6				

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

投影法	第一角	品名	Molex 4.20mm 180° 公摩七八连孔
连接器	MM	(PART NAME)	Wafer Connector Series
单位	MM	料号	W4201VTLT-2x04P-SW
比例/Scale	1:1	(PART NO)	
大小/Size	A4		
页码/Sheet	1/1		
版本/Rev	D		
		状态码	C