
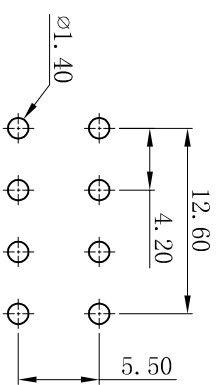
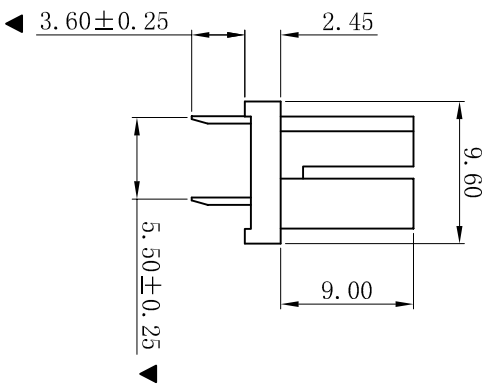



RoHS

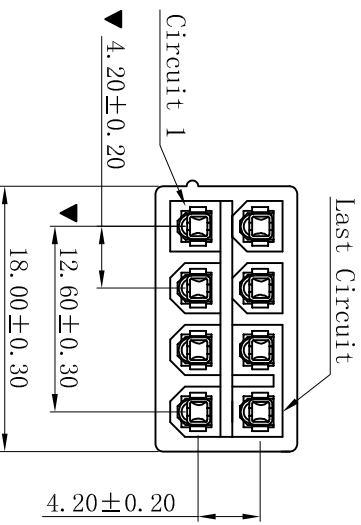

PCB LAYOUT: Component Side
Recommended PCB Thickness 1.78MAX

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C +85° C
- Contact resistance: 20m Ω max

■ WAFER

- Part No. : W4201VTLT-2x04P-V0BKSW
- Poles: 08P
- Housing Material: PA66 UL94V-0 COLOR Black
- Pin Material: Phosphor Bronze
- Contact Area Plating: Matte Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

B	更新图面	2019-07-03	陈雄军	更新图面	2019-07-03	陈雄军
C	修订版本	2015-11-04	陈雄军	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军
版次	说明	日期	承认	说明	日期	承认
REV.	DESCRIPTION	DATE	APPRO.	DESCRIPTION	DATE	APPRO.
1						
2						
3						
4						
5						
6						
7						

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>		<p>投影法 Projection</p>		<p>一般公差 GENERAL TOLERANCE:</p>		<p>0±0.30 .0±0.25 .00±0.20 .000±0.05</p>	
<p>Connector's</p>		<p>审核/CHKC 核准/APPRO</p>		<p>ANGLE: ±1°</p>		<p>陈雄军 胡进</p>	
<p>品名 (PART NAME)</p>		<p>单位 Unit</p>		<p>MM</p>		<p>陈雄军 胡进</p>	
<p>Molex 4.20mm 180° 公座七八连孔 Wafer Connector Series</p>		<p>比例/Scale 大小/Size</p>		<p>1:1 A4</p>		<p>陈雄军 胡进</p>	
<p>料号 (PART NO)</p>		<p>页码/Sheet 版本/Rev</p>		<p>1/1 D</p>		<p>陈雄军 胡进</p>	
<p>W4201VTLT-2x04P-V0BKSW</p>		<p>料号 (PART NO)</p>		<p>1/1 D</p>		<p>陈雄军 胡进</p>	
<p>状态码</p>		<p>日期/DATE</p>		<p>2019-07-03</p>		<p>陈雄军 胡进</p>	
<p>C</p>		<p>日期/DATE</p>		<p>2019-07-03</p>		<p>陈雄军 胡进</p>	