


RoHS


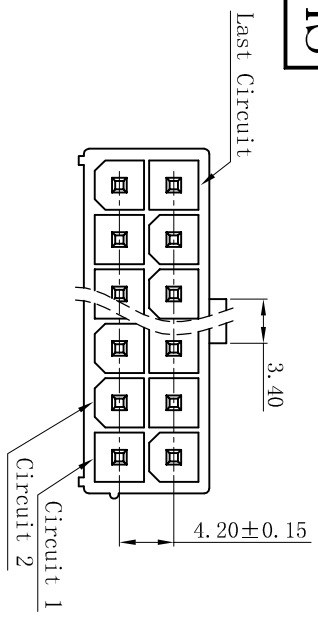


W4202V-2xNP-X X-WL10.3

HSG Material / Color
 None:PA66-V2 Natural
 BK:PA66-V2 Black
 V0:PA66-V0 Natural
 V0BK:PA66-V0 Black
 LP:LCP-V0 Natural
 LPPBK:LCP-V0 Black
 9T:PA9T-V0 Natural
 9TBK:PA9T-V0 Black

Contact Finish
 None:Tin-Plated
 SW:Matte Tin-Plated
 G:Gold-Flash
 G3:3u" Gold
 G10:10u" Gold
 G15:15u" Gold

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202V-2xNP-XX-WL10.3
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - PIN L=1, 14x19.50
 - The Dimension Marked "▲" Must Be Recorded

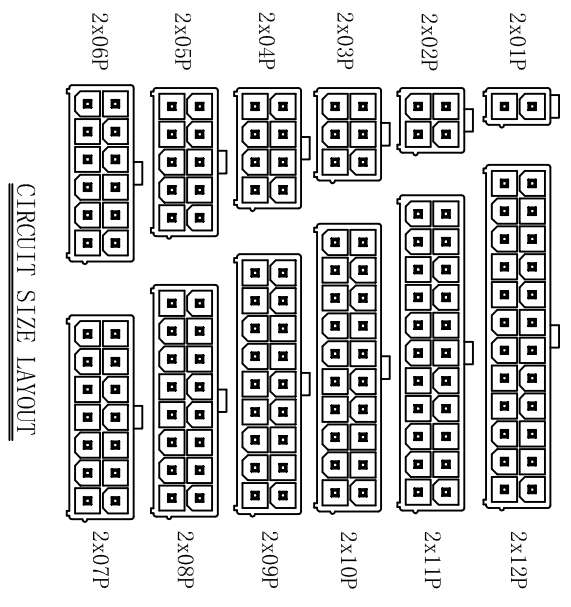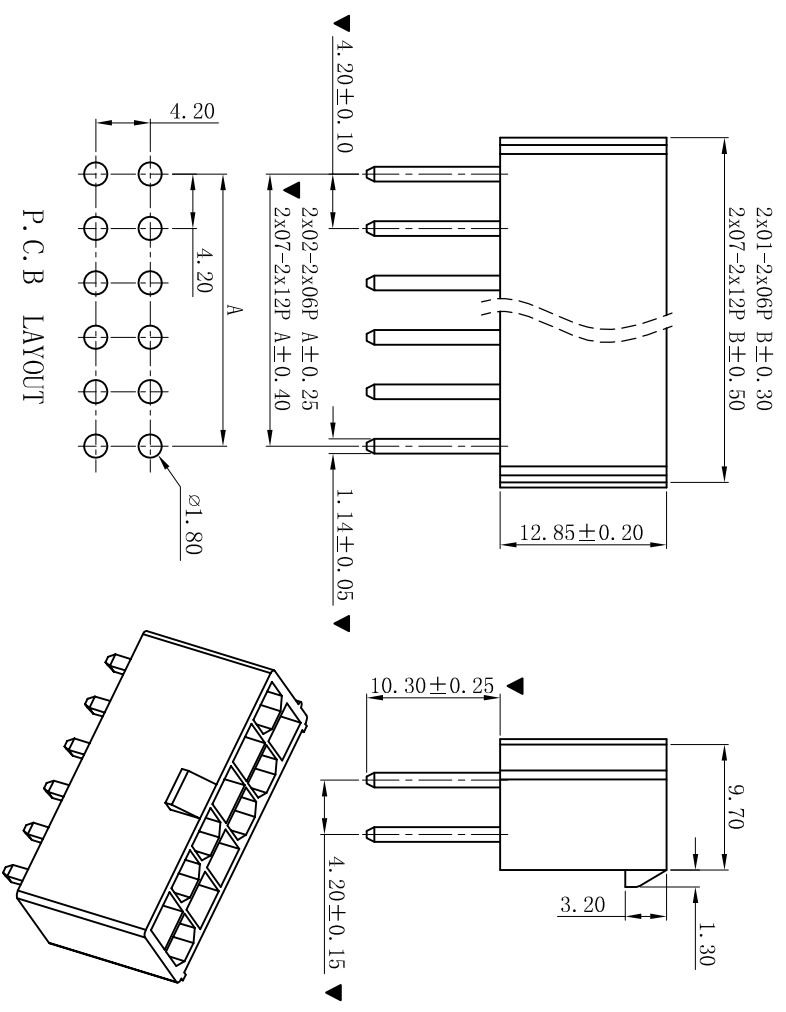

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

更新图画		2019-07-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		Molex4.20mm 180° Wafer	
修打版本		2015-11-04		陈雄军		角度: ±1°		CONNECTORS		单位 Unit		东莞市祥运连接器有限公司		Dongguan XiangYun Connector's CO.,Ltd	
变更图宽格式内容		2013-12-27		陈雄军		ANGLE: ±1°		CONNECTORS		比例/Scale		料号 (PART NO)		W4202V-2xNP-XX-WL10.3	
新版本		2011-05-24		陈雄军		ANGEL: ±1°		CONNECTORS		大小/Size		料号 (PART NO)		W4202V-2xNP-XX-WL10.3	
说明 DESCRIPTION		日期 DATE		承认 APPRO.		ANGEL: ±1°		CONNECTORS		页码/SHEET		料号 (PART NO)		W4202V-2xNP-XX-WL10.3	
版次 REV.		1		2		3		4		5		6		7	