
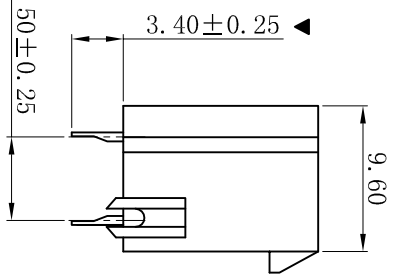
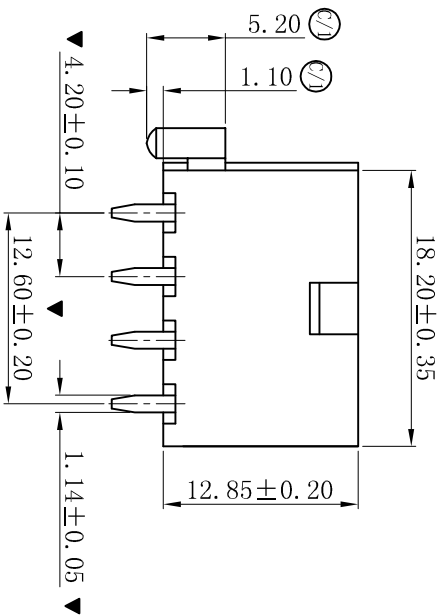



ROHS

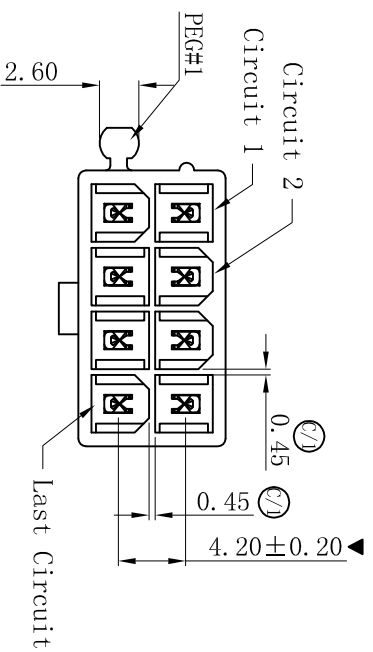

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No. : W4202VTDD-2x04P-V0-P1-BT
- Poles: 08P
- Housing Material: PA66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- Tin Thickness=100u" Nickel Thickness=50u"
- The Dimension Marked "▼" Must Be Recorded

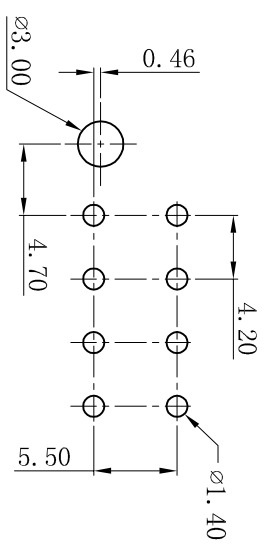

P.C.B LAYOUT

| | | | | | | | | | | | |
|--------|--|---|--|------------|--|------------|--|-----|--|--------------------------|--|
| 更新图面 | | 2019-07-03 | | 陈雄军 | | 0±0.30 | | 投影法 | | 品名 | |
| 修订视图方向 | | 2017-02-23 | | 陈雄军 | | .00±0.25 | | 第一角 | | Molex 4.20mm 180° 空芯左带柱 | |
| C/2 | | | | | | .000±0.05 | | MM | | Wafer Connector Series | |
| C/1 | | 1. 内壁壁厚尺寸由0.40mm变更为0.45mm 2. 柱子高度7.00变更为5.20, 3. 25mm变更为1.10mm | | 2016-09-01 | | ANGLE: ±1° | | 1:1 | | 料号 | |
| C | | 修订版本 | | 2015-11-04 | | | | A4 | | W4202VTDD-2x04P-V0-P1-BT | |
| 版次 | | 说明 | | 陈雄军 | | | | 1/1 | | 状态码 | |
| REV. | | DESCRIPTION | | APPRO. | | | | D | | C | |

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd