


W4202VTF-2xNP-X X X-WJ

HSG Material/Color
None:PA66-Y2 Natural
BK:PA66-Y2 Black
V0:PA66-Y0 Natural
V0BK:PA66-Y0 Black
LP:LCF-V0 Natural
LPBK:LCF-V0 Black
9T:PA9T-V0 Natural
9TBK:PA9T-V0 Black
46:PA46-V0 Natural
46BK:PA46-V0 Black
6T:PA6T-V0 Natural
6TBK:PA6T-V0 Black

COLOR:
None:Natural
Bl.:蓝色
CN.:绿色
BK.:黑色
Wt.:白色

Contact Finish
None: Tin-Plated
Tin Thickness=100μ"
Nickel Thickness=50μ"
SP: Matte Tin-Plated
G: Gold-Flash
G3: 3μ" Gold
G10: 10μ" Gold
G15: 15μ" Gold
G30: 30μ" Gold

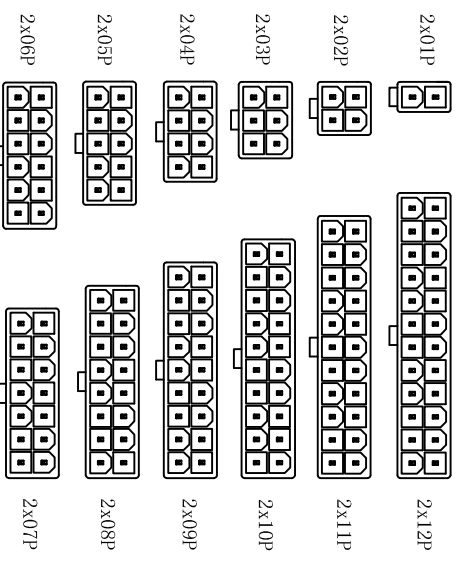

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

- ### ■ SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C~+55 °C
 - Contact resistance: 20mΩ max
- ### ■ WAFER
- Part No.: W4202VTF-2xNP-XXX-WJ
 - Poles : 02-24P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Mates With: H4201 dual row receptacle
 - The Dimension Marked "▼" Must Be Recorded

CIRCUIT SIZE LAYOUT

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

投影法 Projection	第一角投影 1st Angle
单位 Unit	毫米 MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D

品名 (PART NAME)	Molex 4.20mm 180° 空芯封孔 无筋 Wafer Connector Series
料号 (PART NO)	W4202VTF-2xNP-XXX-WJ
状态码	C

D	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	变更图宽格式内容	2013-12-27	陈雄军	新版本
A	新版本	2011-05-24	陈雄军	说明
版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----