


RoHS


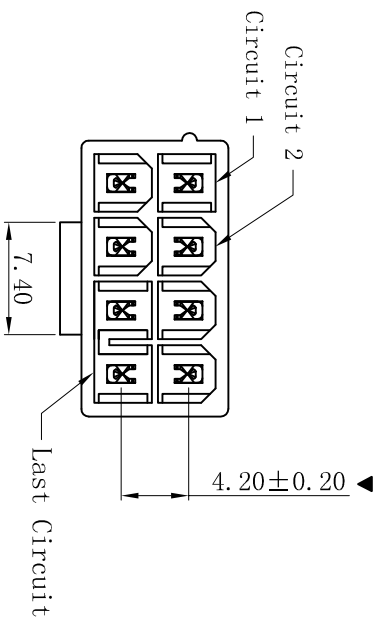


W4202VTLK-2x04P-X X

HSG Material/Color  
None:PA66-V2 Natural  
BK:PA66-V2 Black  
V0:PA66-V0 Natural  
V0BK:PA66-V0 Black  
LP: LCP-V0 Natural  
LPBK: LCP-V0 Black  
9T: PA9T-V0 Natural  
9TBK: PA9T-V0 Black  
46: PA46-V0 Natural  
46BK: PA46-V0 Black  
6T: PA6T-V0 Natural  
6TBK: PA6T-V0 Black

Contact Finish  
None: Tin-plated  
SW: Matte Tin-plated  
G: Gold-Flash  
G3: 3u" Gold  
G10: 10u" Gold  
G15: 15u" Gold

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No.: W4202VTLK-2x04P-XX
  - Poles: 08P
  - Housing Material: PA66 UL94V-2 or UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated or Gold-Flash
  - Tin Thickness=100u" Nickel Thickness=50u"
  - The Dimension Marked "▼" Must Be Recorded

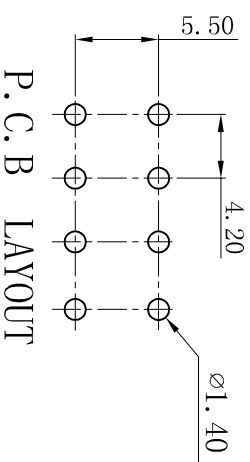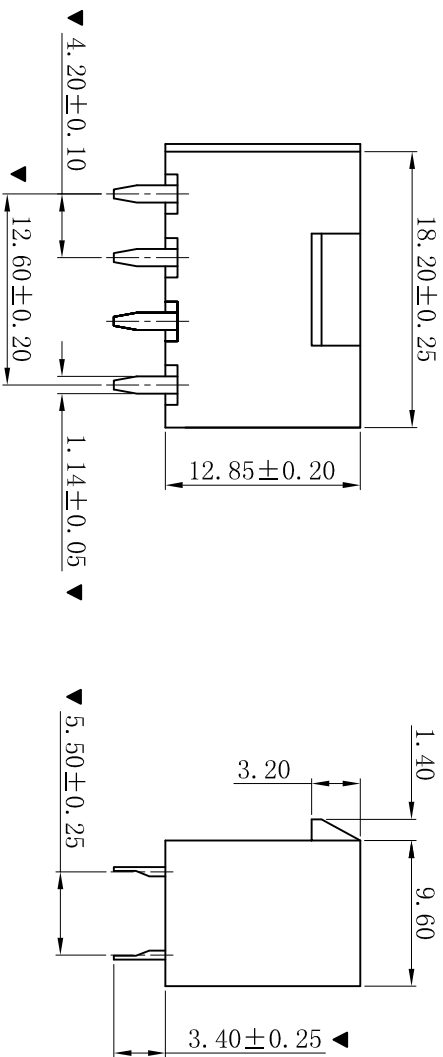

P.C.B LAYOUT

D	更新图画	2019-07-03	陈雄军	更新图画
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHCK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	品名 (PART NAME)	Molex 4.20mm 180° 空芯七八连体 Wafer Connector Series
单位 Unit	料号 (PART NO)	W4202VTLK-2x04P-XX
比例/Scale	页码/SHEET	1/1
大小/Size	版本/Rev	D
状态码		C