


ROHS



W4202VTLKX-2x04P-XX

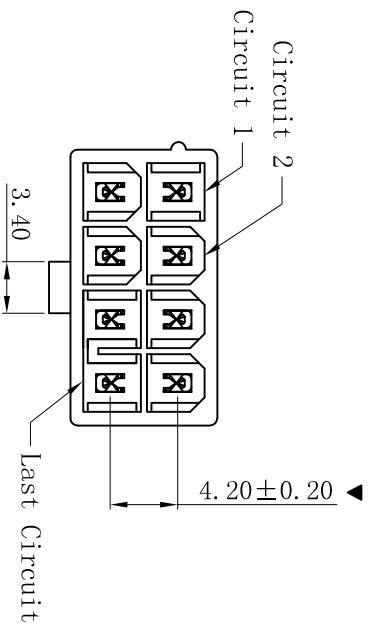

HSG Material/Color
 None:PA66-V2 Natural
 BK:PA66-V2 Black
 V0:PA66-V0 Natural
 V0BK:PA66-V0 Black
 LP:LCP-V0 Natural
 LPBK:LCP-V0 Black
 9T:PA9T-V0 Natural
 9TBK:PA9T-V0 Black
 46:PA46-V0 Natural
 46BK:PA46-V0 Black
 6T:PA6T-V0 Natural
 6TBK:PA6T-V0 Black

Contact Finish
 None:Tin-plated
 SW:Matte Tin-Plated
 G:Gold-Flash
 G3:3u" Gold
 G10:10u" Gold
 G15:15u" Gold

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance:1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W4202VTLKX-2x04P-XX
 - Poles: 08P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated or Gold-Flash
 - Tin Thickness=100u" Nickel Thickness=50u"
 - The Dimension Marked "▼" Must Be Recorded

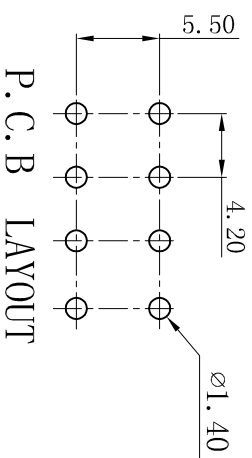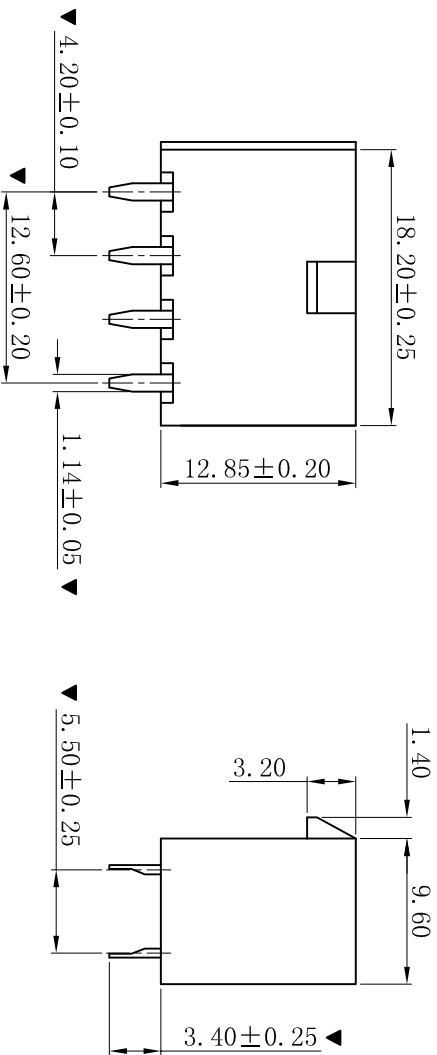

P.C.B LAYOUT

D	更新图面	2019-07-03	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容
B	新版本	2013-12-27	陈雄军	新版本
A	说明	2011-05-24	陈雄军	说明
H	版次	1	1	版次
H	REV.	1	1	REV.

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1 $^{\circ}$	
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-07-03

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

投影法
 Projection
 单位 Unit
 Unit
 比例/Scale
 Scale
 大小/Size
 Size
 页码/SHEET
 SHEET
 版本/Rev
 Rev

品名
 (PART NAME)
 Molex 4.20mm 180 $^{\circ}$ 空芯七八连体
 Wafer Connector Series

料号
 (PART NO)
 W4202VTLKX-2x04P-XX

状态码
 C