


RoHS

SPECIFICATIONS


- Voltage rating: 300V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

HOUSING


- Part No. : H4501-NP
- Poles: 02-04P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

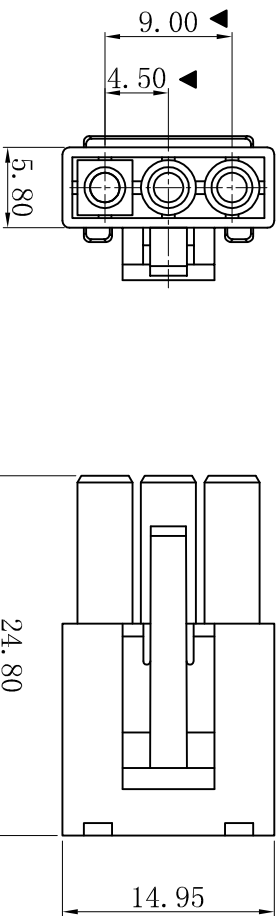

H4501-03P

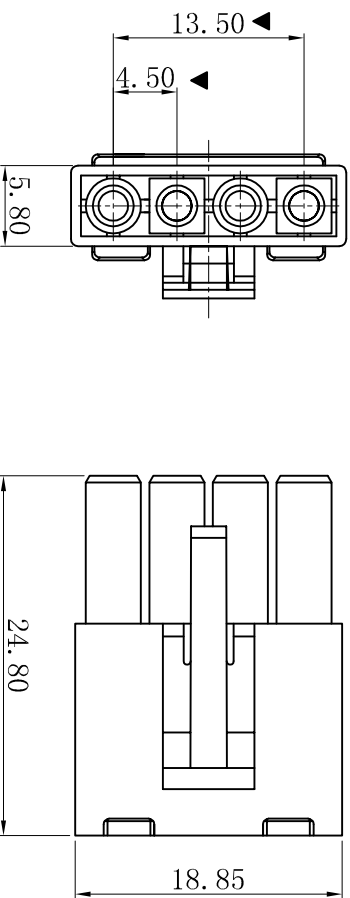

H4501-04P

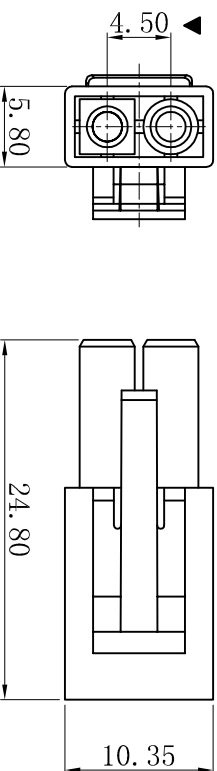

H4501-02P

					XYDZ® 东莞市祥运连接器有限公司	
					Dongguan XiangYun Connectors CO.,Ltd	
					Connectors	
D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05	投影法 Projection 
C	修订版本	2015-11-04	陈雄军	ANGLE: ±1°		
B	变更图宽格式内容	2013-12-27	陈雄军	绘图/DR	单位 Unit	
A	新版本	2011-05-24	陈雄军	审核/CHECK	比例/Scale	
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.	核准/APPRO	胡 进	大小/SIZE
				日期/DATE	2019-06-03	A4
					版本/Rev	1/1
					D	料 号
						(PART NO)
						EL4.50mm Male Housing
						Connector Series
						H4501-NP
						状态码
						C

H4501-04P

H4501-02P