


RoHS

SPECIFICATIONS



- Voltage rating: 300V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

HOUSING


- Part No.: H4502-2xNP
- Poles: 04-06P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

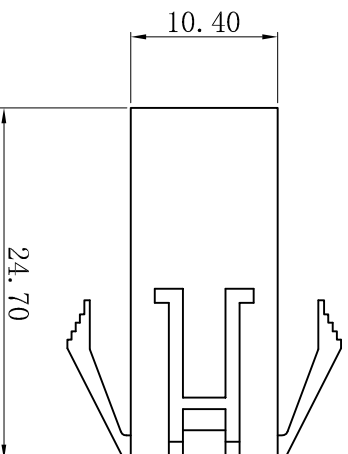

H4502-2x02P
H4502NE-2x02P

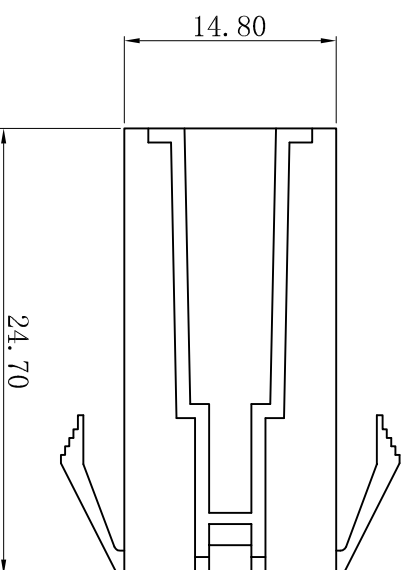

H4502-2x03P
H4502NE-2x03P

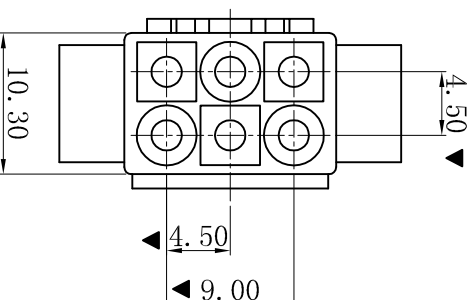

					XYDZ® 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO.,Ltd 投影法 Connectors  品 名 (PART NAME) EL4.50mm Female Housing Connector Series 料 号 (PART NO) H4502-2xNP 状态码 C																			
					一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°																	
D	更新图面	2019-06-03	陈雄军		绘图/DR		陈雄军		单位 Unit		MM		品 名 (PART NAME)		EL4.50mm Female Housing Connector Series		料 号 (PART NO)		H4502-2xNP		状态码		C	
C	修订版本	2015-11-04	陈雄军																					
B	变更图宽格式内容	2013-12-27	陈雄军		审核/CHECK		陈雄军		比例/Scale		1:1													
A	新版本	2011-05-24	陈雄军		核准/APPRO		胡 进		大小/Size		A4													
版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.		日期/DATE		2019-06-03		页码/SHEET		1/1		版本/Rev		D		(PART NO)							