


ROHS




8.25

3.75

8.85

10.30

4.50





21.20

4.00

6.00

7.15

19.60

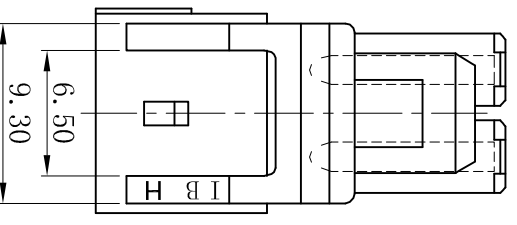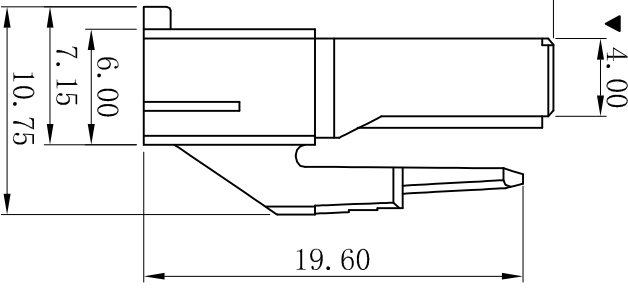

9.30

6.50

■ SPECIFICATIONS

- Voltage rating: 300V AC, DC
- Current rating: 10A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Part No. : H4503MF-02P
- Poles: 02P
- Housing Material: PA66 UL94V-0
- Qty: 500Pcs/bag
- The Dimension Marked "▲" Must Be Recorded

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.20 ANGLE: ±1°
-------------------------------	---

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

更新图面 新版本	2019-06-03	2018-03-21
-------------	------------	------------

投影法  
Projection

单位 Unit  
MM

比例/Scale  
1:1

大小/Size  
A4

页码/Sheet  
1/1

版本/Rev  
B

品名  
(PART NAME)

YL4.50mm Male Housing  
Connector Series

料号  
(PART NO)

H4503MF-02P

状态码  
C

更新图面 新版本	2019-06-03	2018-03-21	2019-06-03	承认 APPRO.	日期 DATE.	说明 DESCRIPTION	版次 REV.
-------------	------------	------------	------------	--------------	-------------	-------------------	------------