

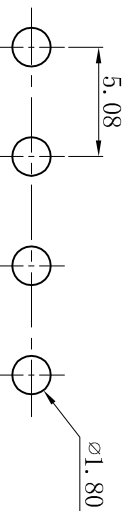
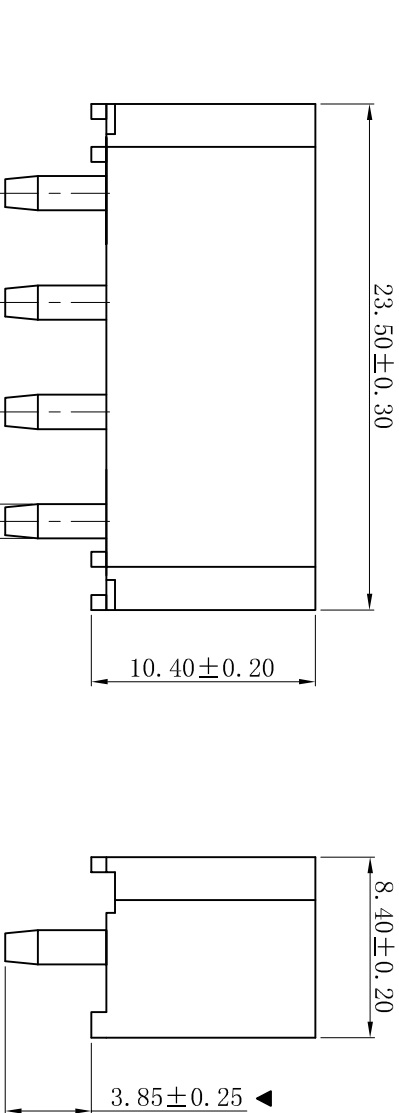


ROHS HALOGEN FREE

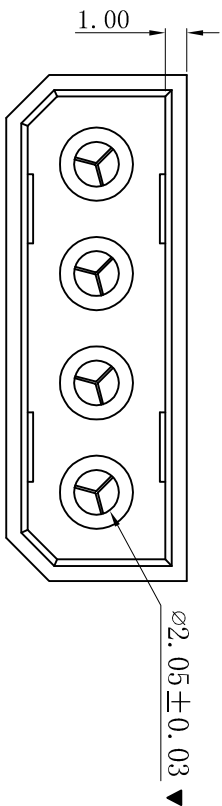

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C +85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W5082V-04P-V0-WL3.85-HF
 - Housing Material: PA66 UL94V-0 (HF)
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

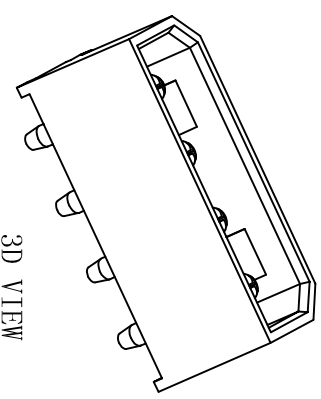

3D VIEW

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.20
ANGLE: ±1 $^{\circ}$	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

<p>XYDZ[®] 东莞市祥运连接器有限公司 Connectors Dongguan XiangYun Connectors CO., Ltd</p>	
投影法 Projection	
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D
品名 (PART NAME)	Mollex 5.08mm 180 $^{\circ}$ Wafer
料号 (PART NO)	W5082V-04P-V0-WL3.85-HF
状态码	C