

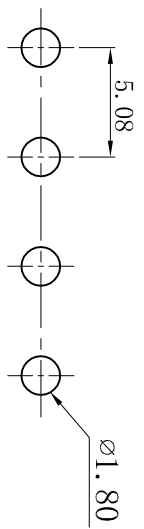
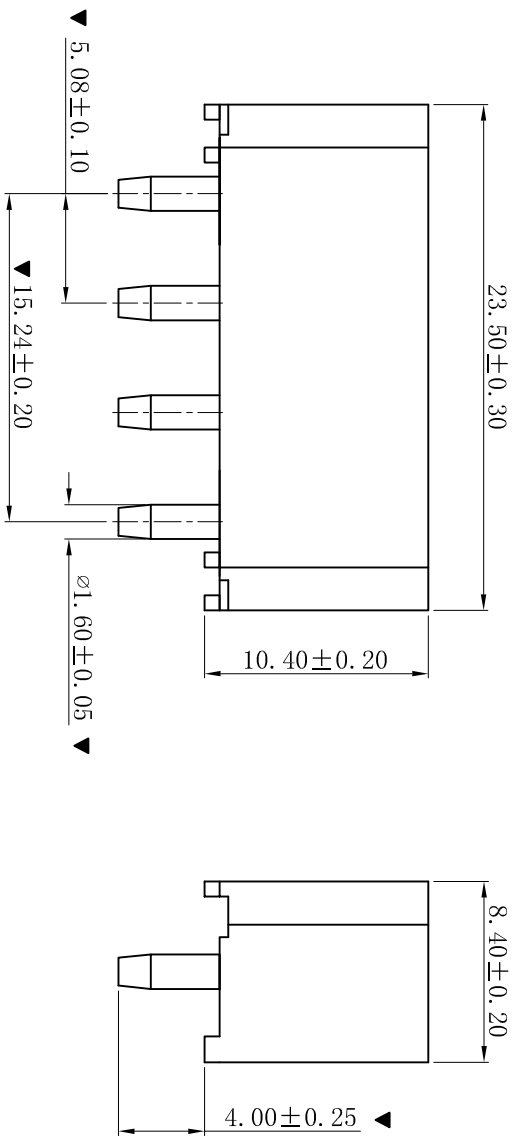


ROHS

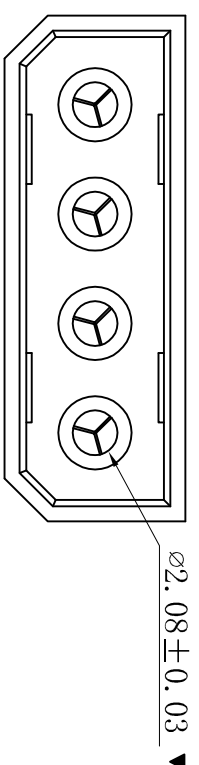

P.C.B LAYOUT: TOP VIEW
TOLERANCE: $\pm 0.05\text{mm}$

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C⁺+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W5082V-04P
 - Housing Material: PA66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

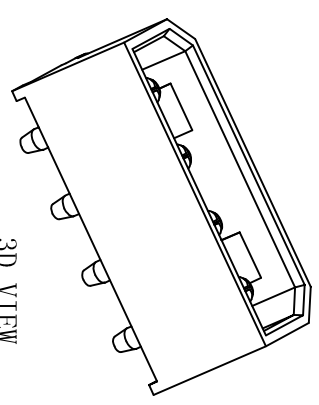

3D VIEW

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE
1	1	2	3
2	3	4	5

一般公差 GENERAL TOLERANCE:	0 \pm 0.30 .0 \pm 0.25 .000 \pm 0.20
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ[®] 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

品名 (PART NAME)	Molex 5.08mm 180 $^{\circ}$ Wafer Connector Series
料号 (PART NO)	W5082V-04P
状态码	C