




RoHS

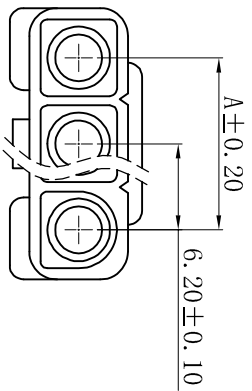

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 7A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H6202N-1XNP-J
  - Poles : 02-04P
  - Housing Material: PA66 UL94V-2
  - The Dimension Marked “▲” Must Be Recorded

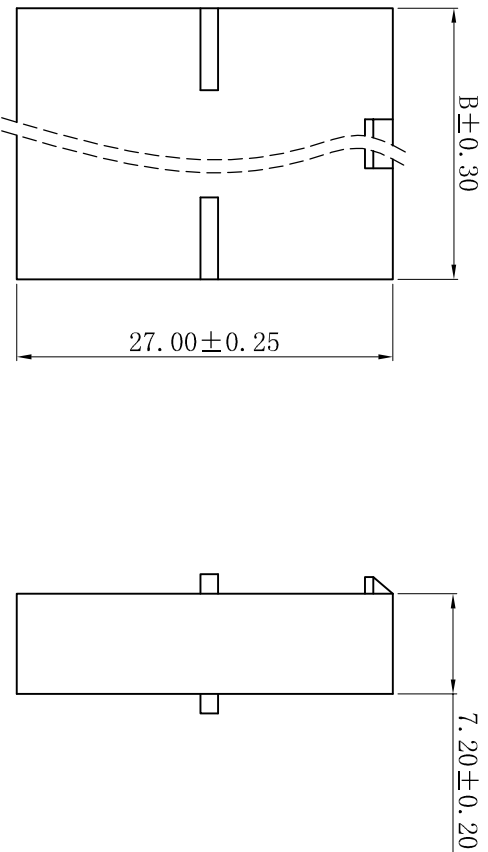

Poles	Dimensions (mm)	
	A	B
02P	6.20	13.40
03P	12.40	19.60
04P	18.60	25.80

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	2019-06-03
C	修打版本	2015-11-04	陈雄军	绘图/DR 审核/CHECK 批准/APPRO	胡进
B	变更图宽格式内容	2013-12-27	陈雄军	日期/DATE	2019-06-03
A	新版本	2011-05-24	陈雄军	日期/DATE	2019-06-03
H	说明	说明	承认	日期/DATE	2019-06-03
1	版次	版次	承认	日期/DATE	2019-06-03
1	REV.	REV.	承认	日期/DATE	2019-06-03

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法  
单位 Unit: MM  
比例/Scale: 1:1  
大小/Size: A4  
页码/Sheet: 1/1  
版本/Rev: D

品名 (PART NAME): L6.20mm Female Housing Connector Series  
料号 (PART NO.): H6202N-1XNP-J  
状态码: C