



RoHS

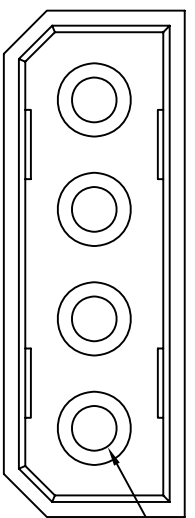

$\varnothing 2.05 \pm 0.03 \blacktriangledown$

23.50 ± 0.30

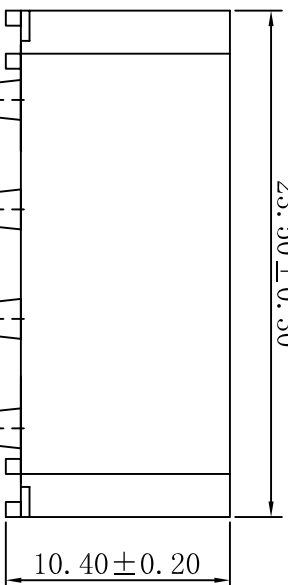


10.40 ± 0.20

5.08 ± 0.10

15.24 ± 0.20


$\varnothing 1.60 \pm 0.05 \blacktriangledown$

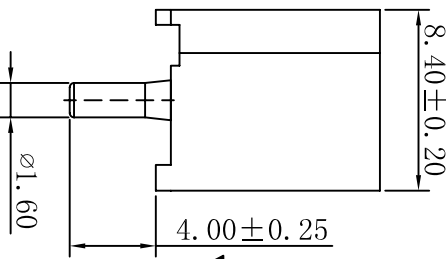


8.40 ± 0.20

4.00 ± 0.25

$\varnothing 1.60$

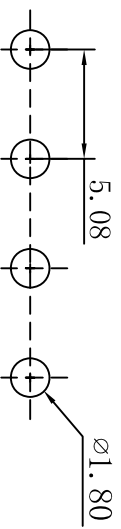

P. C. B LAYOUT

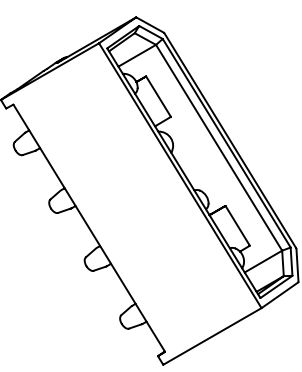

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W5082VG-04P
 - Housing Material: Nylon66 UL94V-2 or UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Gold-Flash
 - The Dimension Marked "▼" Must Be Recorded

G		修订版本		2015-11-04		陈雄军		一般公差		0 \pm 0.30		投影法		品名		MX5.08mm 180 $^{\circ}$ Wafer	
H		变更图章格式内容		2013-12-27		陈雄军		GENERAL TOLERANCE:		.00 \pm 0.20		第一角投影		(PART NAME)		Connector Series	
H		新版本		2011-05-24		陈雄军		ANGLE: $\pm 1^{\circ}$.000 \pm 0.05		MM		料号		W5082VG-04P	
H		说明		日期		承认		DRAWING/DR		MR. feng		A4		版本号		C	
H		DESCRIPTION		DATE		APPRO.		审核/CHECK		MR. feng		1/1		页码/SHEET		C	
H		REV.		1		1		日期/DATE		2015-11-04		大小/SIZE		I/1		版本/rev	
H		1		2		3		6		7		8		9		10	

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan Xiangyun Connectors CO., Ltd

Connectors