
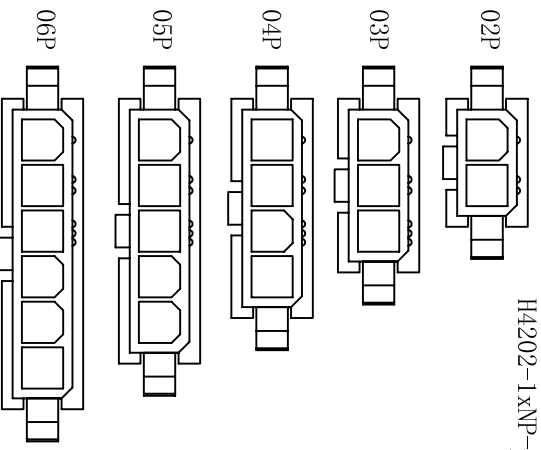
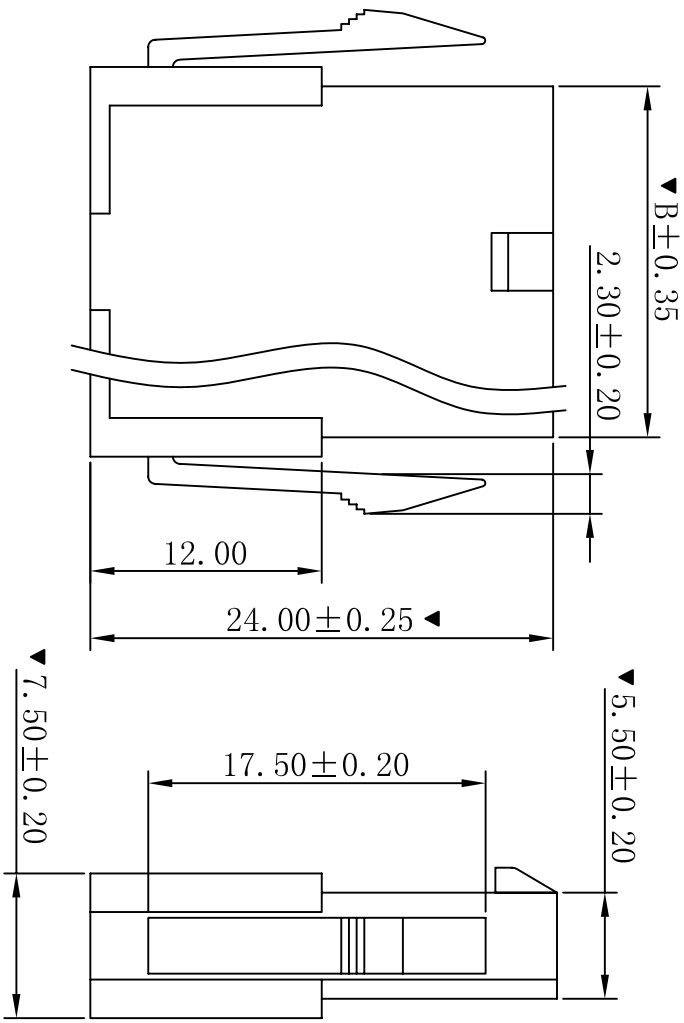



ROHS

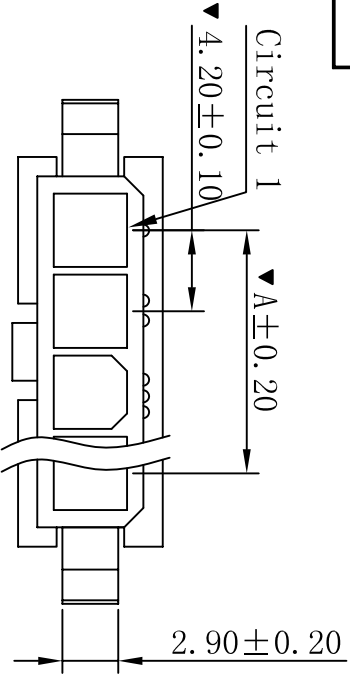

CIRCUIT SIZE LAYOUT

Part No	Dimensions (mm)	
	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25 °C +85 °C
- Contact resistance: 20mΩ max
- HOUSING
- Part No.: H4202-1xNP-XX
- Poles: 02-06P
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Mates With: H4201 Single row receptacle
- Use With: T4201 terminals
- The Dimension Marked “▼” Must Be Recorded

H4202-1xNP-XX

None:Pa66-V2 Natural
BK:Pa66-V2 Black
V0:Pa66-V0 Natural
V0BK:Pa66-V0 Black

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connectors Co., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	MR. feng
日期/DATE	2015-11-04

投影法
Projection



单位 Unit
MM

比例/Scale
1:1

大小/SIZE
A4

页码/SHEET
1/1

品名 (PART NAME)
MX4.20mm Female Housing
Connector Series

料号 (PART NO)
H4202-1xNP-XX

修订版本 REV.	变更图宽格式内容 新版本	2015-11-04	陈雄军	陈雄军	2015-11-04	胡进	MR. feng	2015-11-04	1
说明 DESCRIPTION	说明	2011-05-24	陈雄军	承认	2011-05-24	胡进	MR. feng	2011-05-24	1