
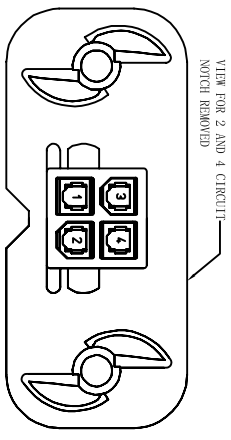
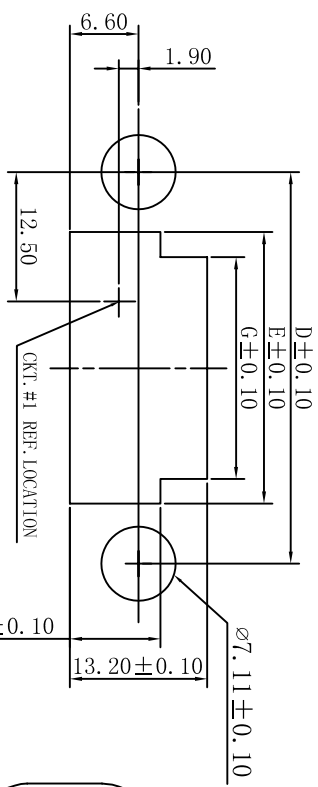


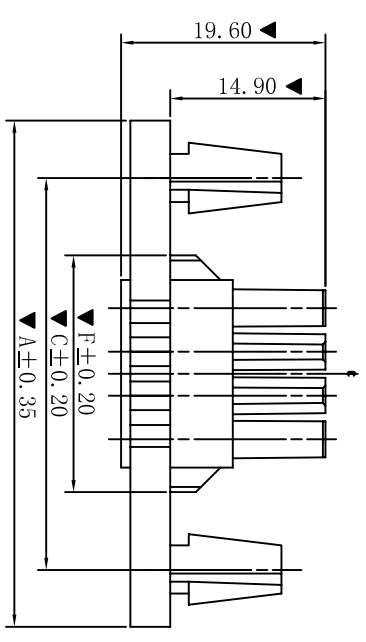



ROHS

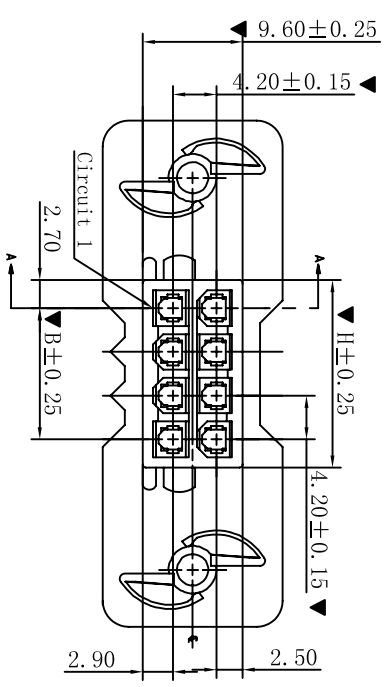

PCB CUTOUIT PANEL THICKNESS 1.27

- SPECIFICATIONS
- Voltage rating: 600V AC, DC
 - Current rating: 7A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : H4201L-2xNP-XX
 - Poles: 02-24P
 - Housing Material: Nylon66 UL94V-2 or UL94V-0
 - Mates With: H4202 and W4202 dual row connectors
 - Use With: T4202 terminals
 - The Dimension Marked "▼" Must Be Recorded

Part No	Dimensions (mm)									
	A	B	C	D	E	F	G	H		
2x01	36.00	▼	25.00	25.00	13.40	10.10	8.70	5.40		
2x02	40.20	4.20	29.20	29.20	17.60	14.30	12.90	9.60		
2x03	44.40	8.40	33.40	33.40	21.80	18.50	17.10	13.80		
2x04	48.60	12.60	37.60	37.60	26.00	22.70	21.30	18.00		
2x05	52.80	16.80	41.80	41.80	30.20	26.90	25.50	22.20		
2x06	57.00	21.00	46.00	46.00	34.40	31.10	29.70	26.40		
2x07	61.20	25.20	50.20	50.20	38.60	35.30	33.90	30.60		
2x08	65.40	29.40	54.40	54.40	42.80	39.50	38.10	34.80		
2x09	69.60	33.60	58.60	58.60	47.00	43.70	42.30	39.00		
2x10	73.80	37.80	62.80	62.80	51.20	47.90	46.50	43.20		
2x11	78.00	42.00	67.00	67.00	55.40	52.10	50.70	47.40		
2x12	82.20	46.20	71.20	71.20	59.60	56.30	54.90	51.60		

修订版本		2015-11-04	陈雄军	一般公差	0±0.30	投影法 单位 Unit 比例/Scale 大小/SIZE 页码/SHEET 版本/Rev	品名 (PART NAME) MX4. 20mm Male Housing Connector Series	料号 (PART NO) H4201L-2xNP
变更图宽格式内容		2013-12-27	陈雄军	GENERAL TOLERANCE:	.00±0.25 .000±0.05 ANGLE: ±1°			
新版本		2011-05-24	陈雄军	绘图/DR	陈雄军	核准/APPRO	胡进	
说明		2011-05-24	陈雄军	审核/CHECK	MR. feng	日期/DATE	2015-11-04	
DESCRIPTION			承认	日期/DATE	2015-11-04	日期/DATE	2015-11-04	
REV.			承认	日期/DATE	2015-11-04	日期/DATE	2015-11-04	

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connectors CO., Ltd