

RoHS


W4202LTD-2xNP-XX XX

SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max





WAFER

- Part No. : W4202LTD-2xNP-XXXX
- Poles : 04-24P
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Flash
- Mates With: H4201 dual row receptacle
- The Dimension Marked “▼” Must Be Recorded

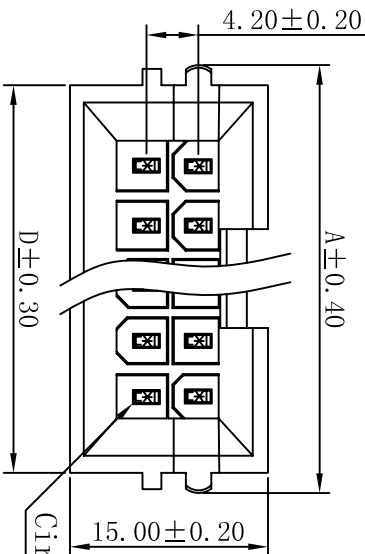

INSULATOR / COLOR
None:Pa66-V2 Natural
BK:Pa66-V2 Black
V0:Pa66-V0 Natural
V0BK:Pa66-V0 Black
LP:LCP-V0 Natural
LPPK:LCP-V0 Black
9T:PA9T-V0 Natural
9TPBK:PA9T-V0 Black

CONTACT FINISH
None:Tin-plated
Tin Thickness=100u”
Nickel Thickness=50u”
SW:Tin Plating Fog
G:Gold-flash
G3:3u” Gold
G10:10u” Gold
G15:15u” Gold

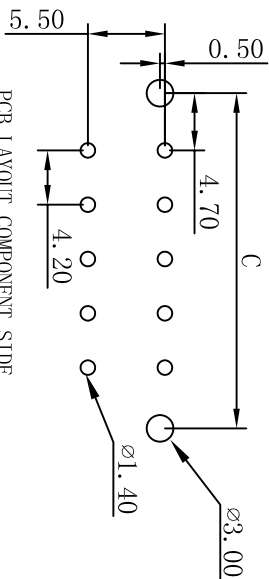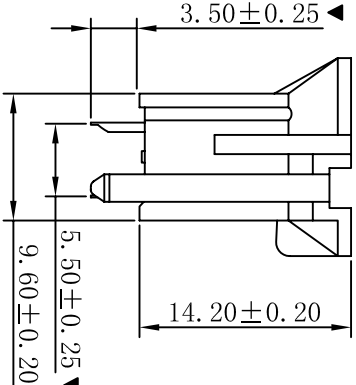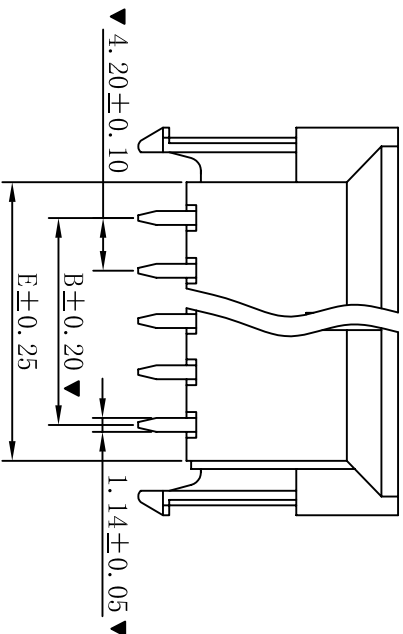

PCB LAYOUT COMPONENT SIDE
RECOMMENDED PCB THICKNESS 1.78 MAX

Part No	Dimensions (mm)				
	A	B	C	D	E
2x02P	17.40	4.20	13.60	15.00	9.80
2x03P	21.60	8.40	17.80	19.20	14.00
2x04P	25.80	12.60	22.00	23.40	18.20
2x05P	30.00	16.80	26.20	27.60	22.40
2x06P	34.20	21.00	30.40	31.80	26.60
2x07P	38.40	25.20	34.60	36.00	30.80
2x08P	42.60	29.40	38.80	40.20	35.00
2x09P	46.80	33.60	43.00	44.40	39.20
2x10P	51.00	37.80	47.20	48.60	43.40
2x11P	55.20	42.00	51.40	52.80	47.60
2x12P	59.40	46.20	55.60	57.00	51.80

C	修订版本	2015-11-04	陈雄军						
B	变更图宽格式内容	2013-12-27	陈雄军						
A	新版本	2011-05-24	陈雄军						
REV.	说明	日期	承认						
1	DESCRIPTION	DATE	APPRO.						

XYDZ® 东莞市祥运连接器有限公司			
Connectors		Dongguan XiangYun Connectors CO.,Ltd	
投影法		品 名	料 号
Projection Unit	MM		
单位 Unit	比例/Scale	(PART NEME)	
	1:1		
大小/SIZE	A4		
页码/SHEET	1/1		
版本/Rev	C		
		MX4.20mm 180° Wafer Connector Series	W4202LTD-2xNP-XXXX
			(PART NO)