
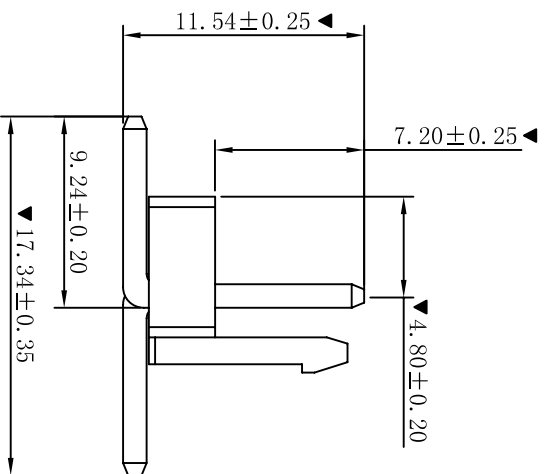
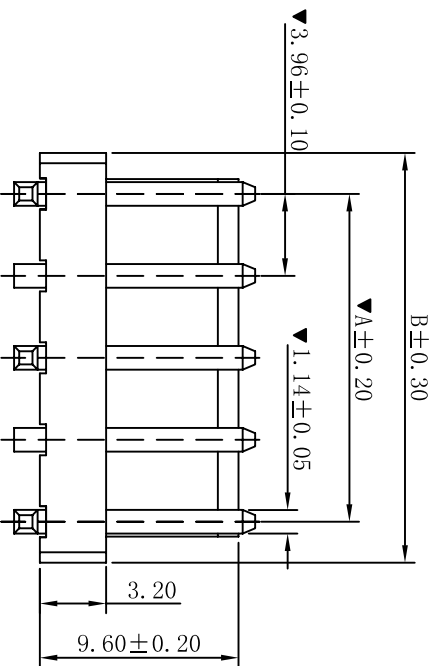


ROHS

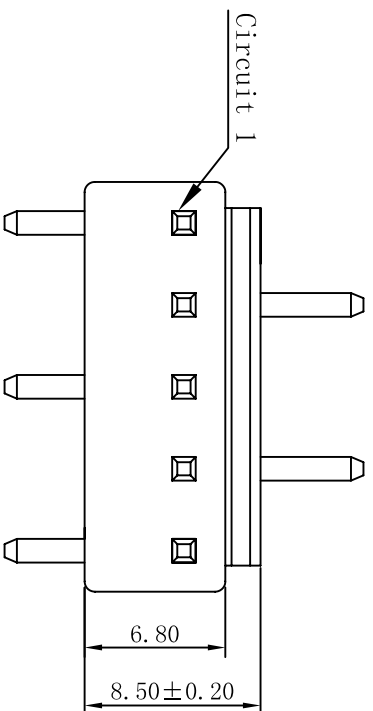

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W3961SV-NP
- Poles : 02-16P
- Housing Material : Nylon66 UL94V-0
- Pin Material : Brass
- Contact Area Plating: Gold-flash or Tin-plated
- The Dimension Marked “▼” Must Be Recorded  
PIN L=1.14x19.10

PART NO.	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
ANGLE: ±1°	

Connectors



品名 (PART NAME) VH3.96mm SMT 180° Wafer  
Connector Series

投影法  
Projection  
单位 Unit: MM  
比例/Scale: 1:1  
大小/SIZE: A4  
页码/SHEET: 1/1  
版本/rev: C

料号 (PART NO) W3961SV-NP

修订版本	2015-11-04	陈雄军
变更图章格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE:	承认 APPRO.

版次 REV.	1	2	3	4	5	6	7	8	9	10
------------	---	---	---	---	---	---	---	---	---	----