






ROHS

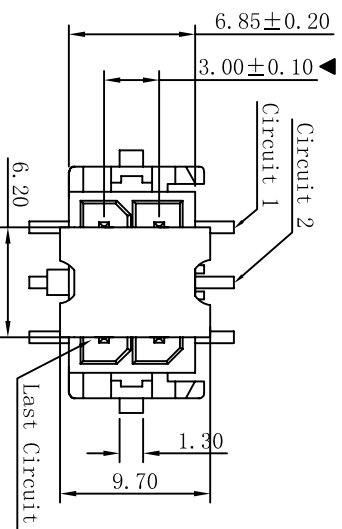


WITH CAP VIEW

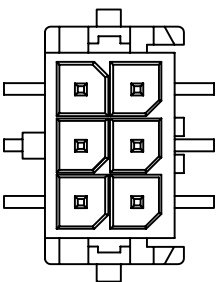

WITHOUT CAP VIEW

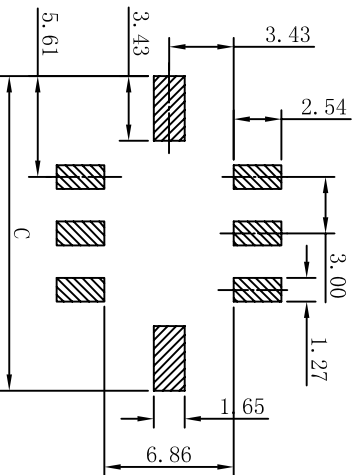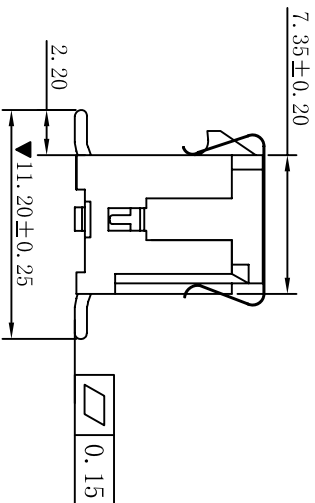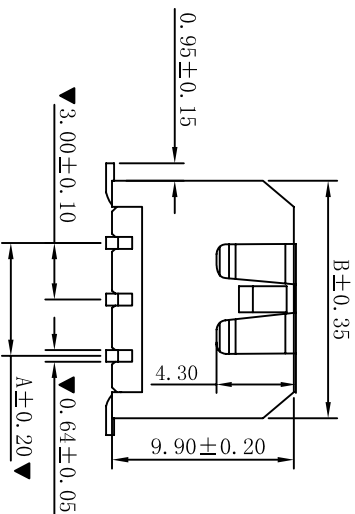

P. C. B. LAYOUT



- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
  - Contact resistance: 20m $\Omega$  max
- WAFER**
- Part No.: W3045SV-2xNP (Y)
  - Poles : 02-24P
  - Housing Material: LCP UL94V-0 Black
  - Ter Material: Brass
  - Solder Tabs Material: Brass
  - Contact Area Plating: Tin-Plated
  - Cap: Stainless Steel
  - The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20
ANGLE: ±1 $^{\circ}$	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	MR. feng
日期/DATE	2016-09-21

<p><b>XYDZ<sup>®</sup> 东莞市祥运连接器有限公司</b> Dongguan Xiangyun Connectors CO., Ltd</p>	
投影法 Projection	
单位/Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/REV	C
品名 (PART NAME)	MX3.0mm SWP 180 $^{\circ}$ 焊片式 Wafer Connector Series
料号 (PART NO)	W3045SV-2xNP (Y)

修订版本	2015-11-04	陈雄军
变更图章格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.
版次 REV.	1	