
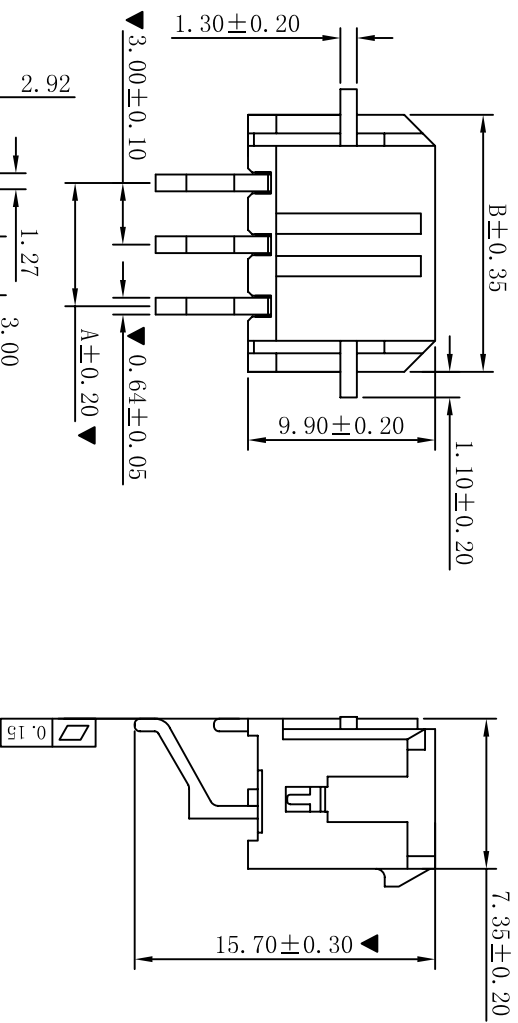



RoHS

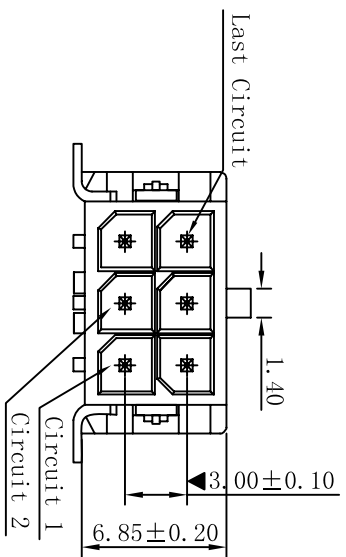

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No. : W3045SR-2xNP (Y)
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▲" Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

G		修订版本		2015-11-04	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.20 ANGLE: ±1 $^{\circ}$	XYDZ [®] 东莞市祥运连接器有限公司 Connectors Dongguan Xiangyun Connectors CO., Ltd		投影法 Projection		品名 (PART NAME)		料号 (PART NO)		
C		变更图章格式内容		2013-12-27	陈雄军	绘图/DR		陈雄军	MM		MX3.0mm SMT 90 $^{\circ}$ 焊片式 Wafer Connector Series		W3045SR-2xNP (Y)		H		
B		新版本		2011-05-24	陈雄军	审核/CHECK		胡进	1:1		料号 (PART NO)		W3045SR-2xNP (Y)		H		
A		说明		日期	承认	批准/APPRO		MR. feng	A4		料号 (PART NO)		W3045SR-2xNP (Y)		H		
H		版次 REV.		说明 DESCRIPTION	日期 DATE	承认 APPRO.		2016-09-21	1/1		料号 (PART NO)		W3045SR-2xNP (Y)		H		
1		2		3		4		5		6		7		8		9	