


- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER**
- Part No.: W3045R-2xNP
 - Poles : 02-24P
 - Housing Material: Nylon66 15%GF U194V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

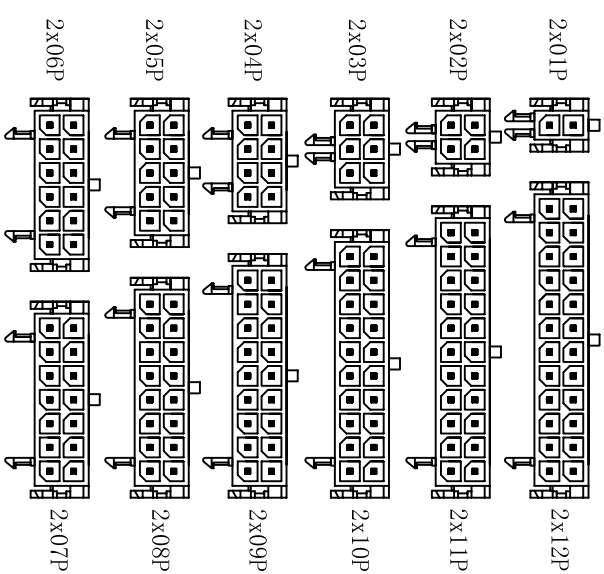

PART NO.	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE:	±1 $^{\circ}$

Connectors



投影法
单位: MM

品名: MX3.0mm 90 $^{\circ}$ Wafer Connector Series

料号: W3045R-2xNP

修订版本	2015-11-04	陈雄军	日期	2015-11-04	承认
变更图宽格式内容	2013-12-27	陈雄军	日期	2011-05-24	承认
新版本		陈雄军	日期		承认
说明		陈雄军	日期		承认
DESCRIPTION		陈雄军	日期		承认
版次		陈雄军	日期		承认
REV.		陈雄军	日期		承认