
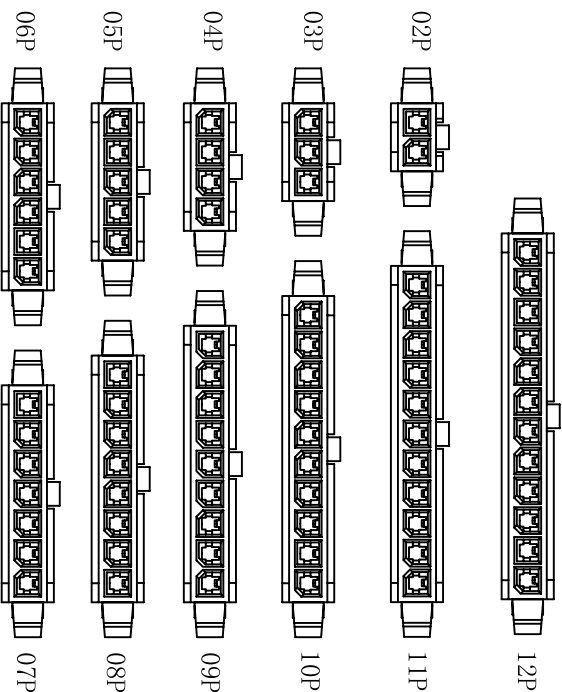
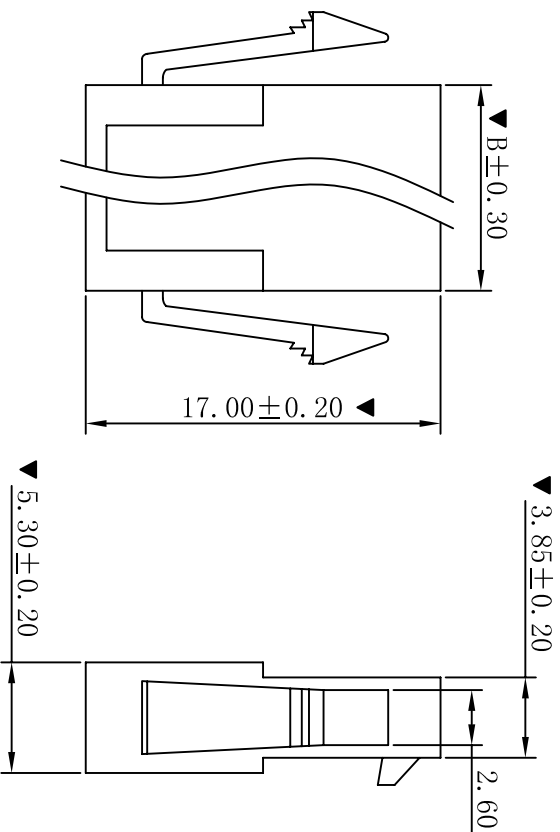



ROHS

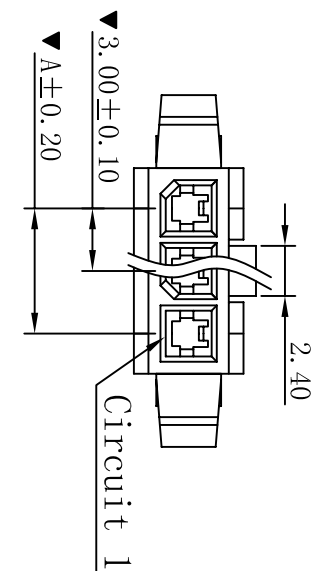

Part No	Dimensions (mm)	
	A	B
02	3.00	6.85
03	6.00	9.85
04	9.00	12.85
05	12.00	15.85
06	15.00	18.85
07	18.00	21.85
08	21.00	24.85
09	24.00	27.85
10	27.00	30.85
11	30.00	33.85
12	33.00	36.85

**SPECIFICATIONS**

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

**HOUSING**

- Part No. : H3020-1xNP
- Poles : 02-12P
- Housing Material: Nylon66 UL94V-2 Black
- The Dimension Marked “▼” Must Be Recorded

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

**Connectors**

投影法  
Projection



单位 Unit  
MM

品名 (PART NAME)  
MX3.00mm Female Housing  
Connector Series

料号 (PART NO)  
H3020-1xNP

修订版本 REV.	2015-11-04	陈雄军
变更图宽格式内容 A	2013-12-27	陈雄军
新版本 B	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.

绘图/DR	陈雄军
审核/CHECK	胡进
核准/APPRO	MR. feng
日期/DATE	2015-11-04

大小/SIZE	A4
页码/SHEET	1/1
版本/REV	C

1 2 3 4 5 6 7 8 9 10