
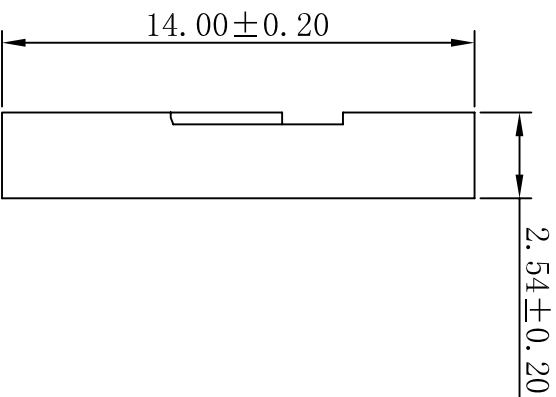
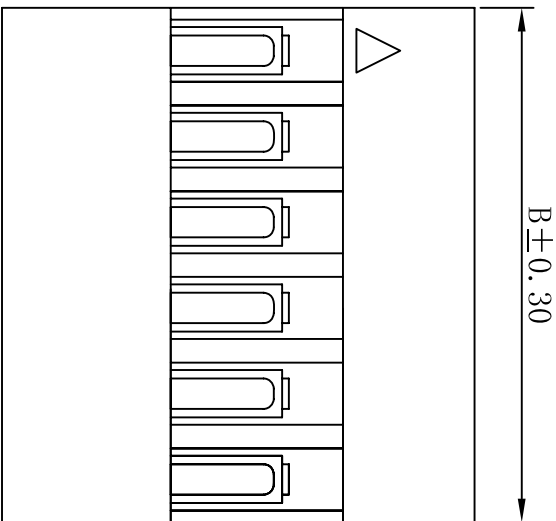
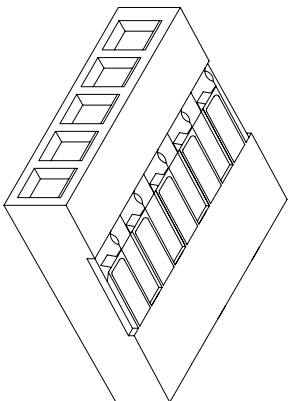


RoHS

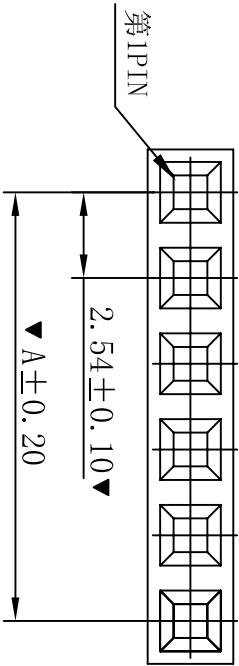

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H2544-1xNP
- Poles : 01-40P
- Housing Material : PBT UL94V-0 Black
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimension		PART NO.	Dimension	
	A	B		A	B
01	—	2.54	21	50.80	53.34
02	2.54	5.08	22	53.34	55.88
03	5.08	7.62	23	55.88	58.42
04	7.62	10.16	24	58.42	60.96
05	10.16	12.70	25	60.96	63.50
06	12.70	15.24	26	63.50	66.04
07	15.24	17.78	27	66.04	68.58
08	17.78	20.32	28	68.58	71.12
09	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

**XYDZ® 东莞市祥运连接器有限公司**  
 Dongguan XiangYun Connectors CO., Ltd

一般公差  
 GENERAL TOLERANCE:  
 0±0.30  
 .0±0.25  
 .000±0.20  
 ANGLE: ±1°

投影法  
 Projection

品名  
 (PART NAME)  
 杜邦2.54mm Housing  
 Connector Series

单位 Unit  
 MM

料号  
 (PART NO)  
 H2544-1xNP

比例/Scale  
 1:1

审核/CHECK  
 胡进

日期/DATE  
 2015-11-04

承认  
 APPRO.

日期/DATE  
 2013-12-27

变更图章格式内容  
 新版本

日期/DATE  
 2011-05-24

说明  
 DESCRIPTION

日期/DATE  
 2015-11-04

版次  
 REV.  
 1

日期/DATE  
 2015-11-04

审核/CHECK  
 陈雄军

日期/DATE  
 2011-05-24

承认  
 APPRO.