

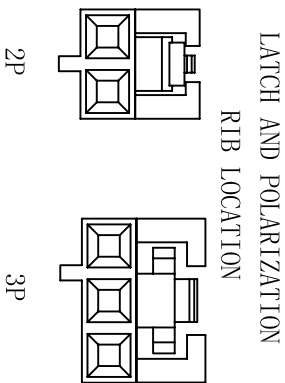
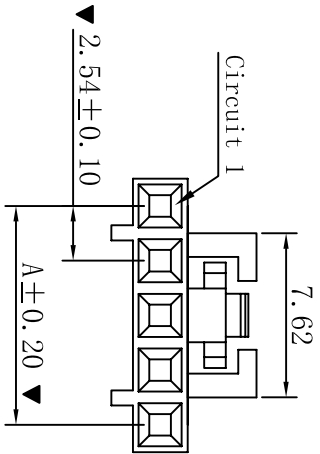

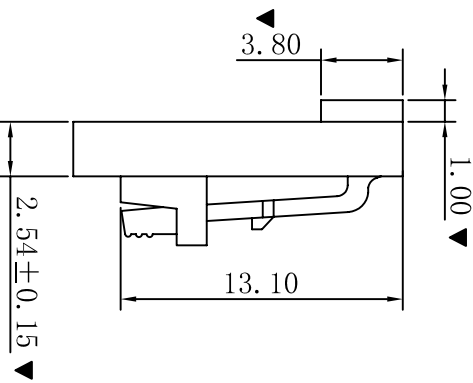


RoHS

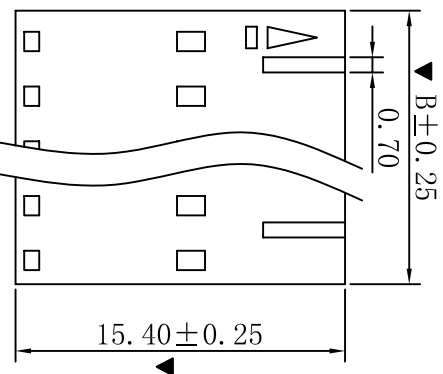

LATCH AND POLARIZATION
RIB LOCATION

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C~+85 °C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : H2545-NP
 - Poles : 02-20P
 - Housing Material: Nylon66 15%GF UL94V-0 Black
 - The Dimension Marked “▼” Must Be Recorded

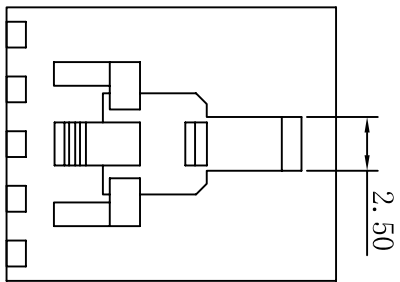

PART NO.	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

修订版本									
变更图宽格式内容									
A	新版本								
说明									
DESCRIPTION									
1	2	3	4	5	6	7	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE:	±1°
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	MR. feng
日期/DATE	2015-11-04

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/SIZE: A4
页码/SHEET: 1/1
版本/Rev: C

品名 (PART NAME): MX2.54mm Male Housing
料号 (PART NO): H2545-NP