
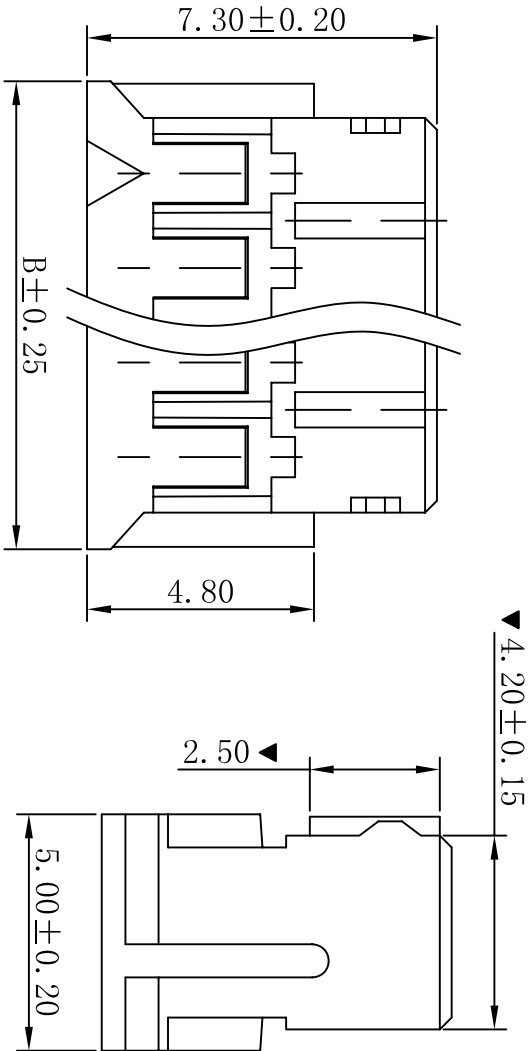
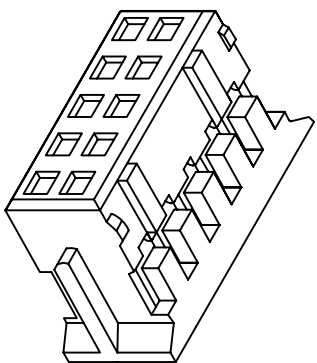


RoHS

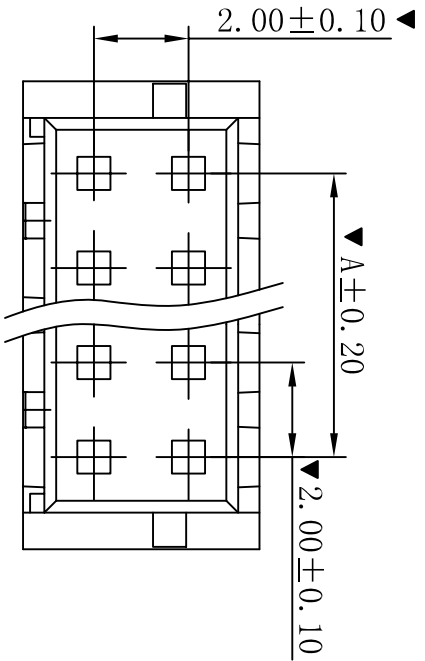

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No. : H2005-2xNP
- Poles : 04-40P
- Housing Material: Nylon66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
2x02P	2.00	5.90
2x03P	4.00	7.90
2x04P	6.00	9.90
2x05P	8.00	11.90
2x06P	10.00	13.90
2x07P	12.00	15.90
2x08P	14.00	17.90
2x09P	16.00	19.90
2x10P	18.00	21.90
2x11P	20.00	23.90
2x12P	22.00	25.90
2x13P	24.00	27.90
2x14P	26.00	29.90
2x15P	28.00	31.90
2x16P	30.00	33.90
2x17P	32.00	35.90
2x18P	34.00	37.90
2x19P	36.00	39.90
2x20P	38.00	41.90

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.125
ANGLE: ±1°	

投影法
Projection



单位 Unit

比例/Scale

大小/SIZE

页码/SHEET

版本/rev





品名 (PART NAME)
PHD2.00mm Housing
Connector Series

料号 (PART NO)
H2005-2xNP

修订版本	2015-11-04	陈雄军	说明	日期	承认
变更图章格式内容	2013-12-27	陈雄军	说明	日期	承认
新版本	2011-05-24	陈雄军	说明	日期	承认
版次 REV.			说明	日期	承认

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

RoHS

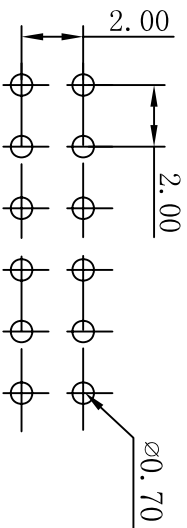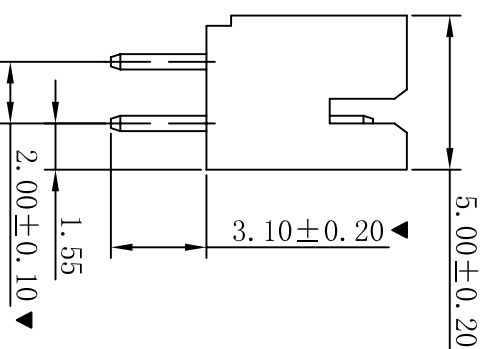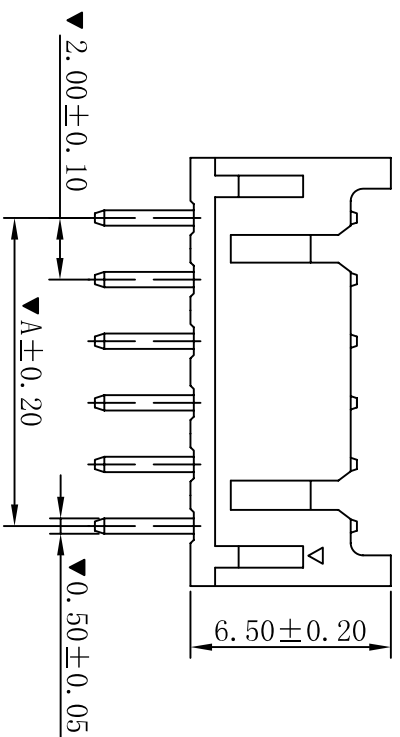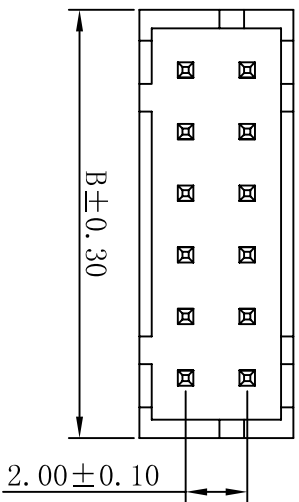

P. C. B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER





- Part No. : W2005V-2xNP
- Poles : 04-40P
- Housing Material : Nylon66 UL94V-0
- Pin Material : Brass
- Contact Area Plating : Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

Part No.	Dimension (mm)	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

修订版本		2015-11-04	陈雄军
变更图章格式内容		2013-12-27	陈雄军
新版本		2011-05-24	陈雄军
说明		日期	承认
DESCRIPTION		DATE	APPRO.

一般公差		0±0.30
GENERAL TOLERANCE:		.00±0.25
		.000±0.05
		ANGLE: ±1°
绘图/DR	陈雄军	投影法
审核/CHECK	胡进	第一角
核准/APPRO	MR. feng	单位 Unit
日期/DATE	2015-11-04	MM
XYDZ® 东莞市祥运连接器有限公司		品名
Connectors		(PART NAME)
Dongguan XiangYun Connectors CO., Ltd		料号
		(PART NO)
		PHD2.00mm 180° Wafer
		Connector Series
		W2005V-2xNP

RoHS

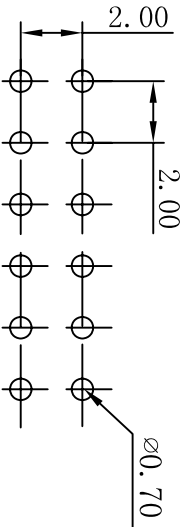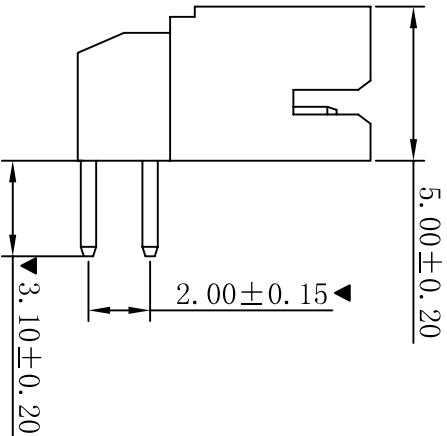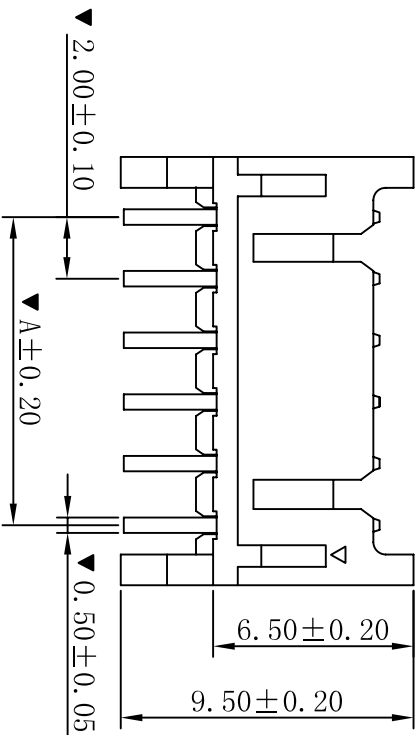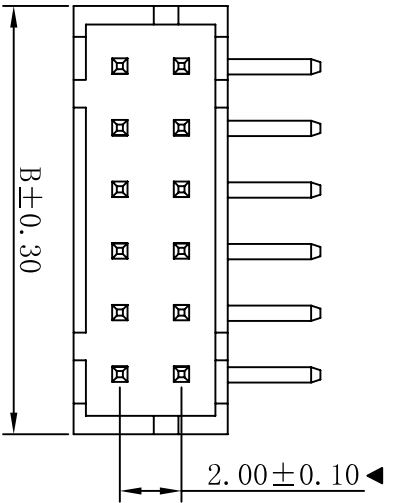

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2005R-2xNP
- Poles : 04-40P
- Housing Material: Nylon66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Part No.	Dimension (mm)	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan Xiangyun Connectors Co., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	MR. feng
日期/DATE	2015-11-04

投影法
Projection



单位 Unit
MM

比例/Scale
1:1

大小/SIZE
A4

页码/SHEET
1/1

品名 (PART NAME)
PHD2.00mm 90° Wafer
Connector Series

料号 (PART NO)
W2005R-2xNP

修订版本	2015-11-04	陈雄军
变更图章格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE	APPRO.

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----