



ROHS


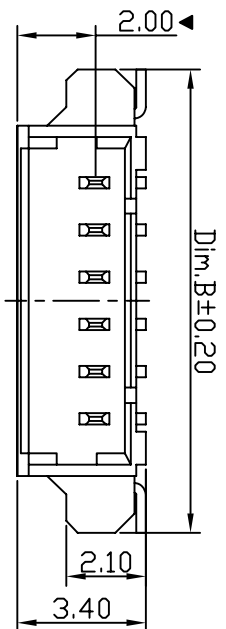


■ SPECIFICATIONS



- Voltage Rating: 125V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 250V AC/minute
- Insulation Resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W1251SR-NP
- Poles : 02-15P
- Material : Nylon 46 UL94V-0
- Pin Material : Phosphor Bronze /Tin-plated
- Solder Tab Material : Brass /Tin-plated
- The Dimension Marked "▲" Must Be Recorded

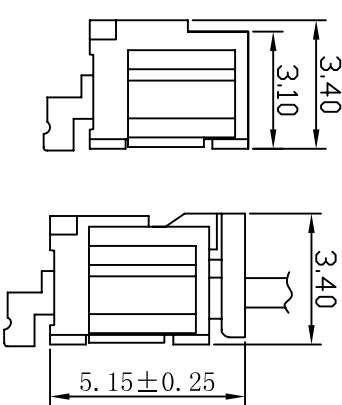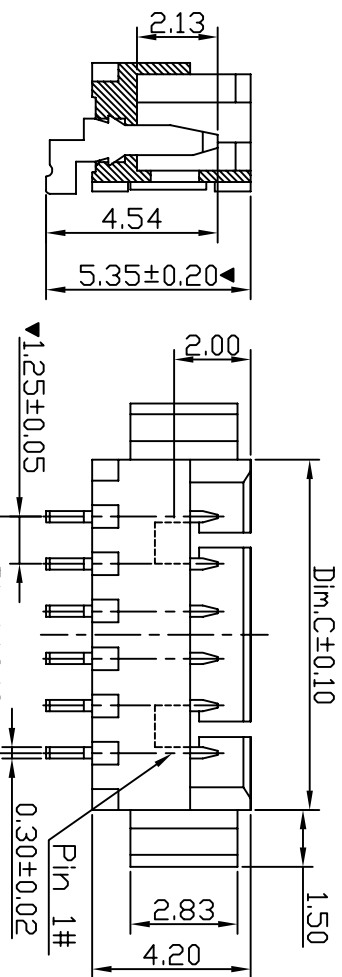

Mating Height Drawing

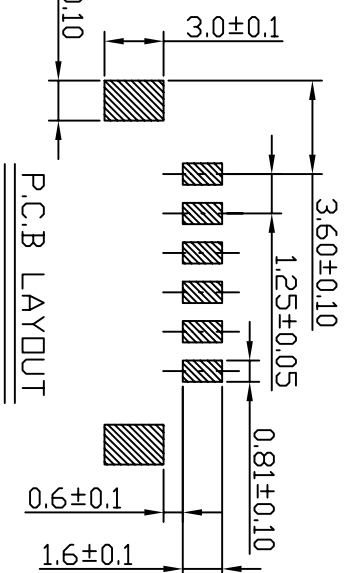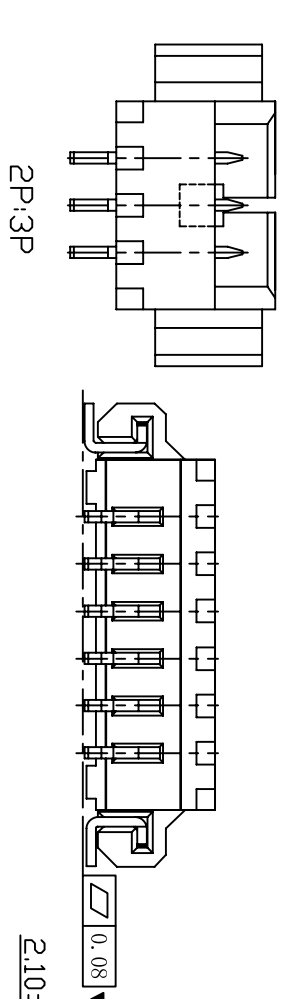

P.C.B LAYOUT

Contacts	Dimensions(mm)		
	Dim A	Dim B	Dim C
02	1.25	7.25	4.25
03	2.50	8.50	5.50
04	3.75	9.75	6.75
05	5.00	11.00	8.00
06	6.25	12.25	9.25
07	7.50	13.50	10.50
08	8.75	14.75	11.75
09	10.00	16.00	13.00
10	11.25	17.25	14.25
11	12.50	18.50	15.50
12	13.75	19.75	16.75
13	15.00	21.00	18.00
14	16.25	22.25	19.25
15	17.50	23.50	20.50

修订版本		2015-11-04		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.20 .0±0.13 .00±0.08 .000±0.02		投影法 Projection		品名 (PART NAME)		MX1.25mm SMT 90° Wafer	
变更图章格式内容		2013-12-27		陈雄军		ANGLE: ±1°		.000±0.02		单位 Unit		Connector Series		W1251SR-NP	
新版本		2011-05-24		陈雄军		ANG. ±1°		.000±0.02		比例/Scale		料号 (PART NO)		W1251SR-NP	
说明 DESCRIPTION		日期 DATE		承认 APPRO.		日期/DATE		2015-11-04		核大/核小 MR. feng		页码/SHEET		1/1	
版次 REV.		1		2		3		4		5		6		7	

XYDZ® 东莞市祥运连接器有限公司  
Dongguan Xiangyun Connector's CO., Ltd