
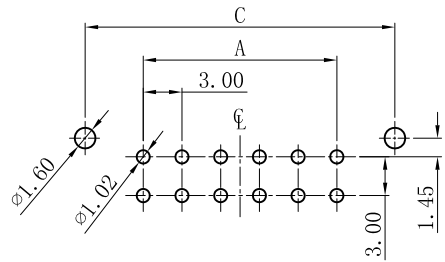
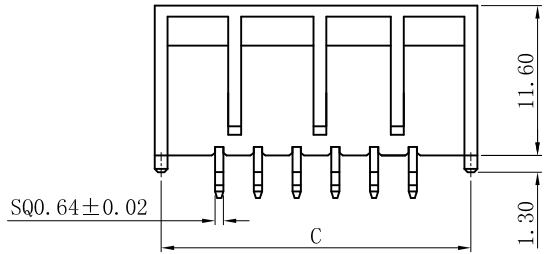
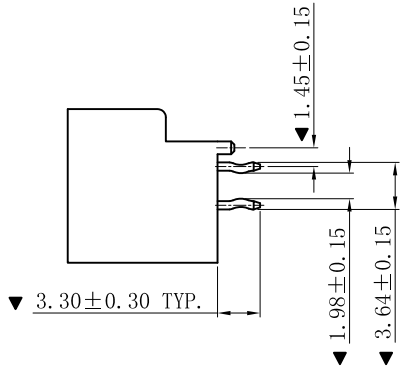



RoHS

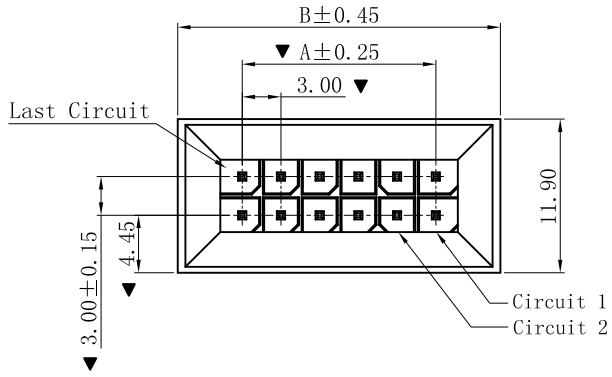

P. C. B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

W3045LBKV-2xNP-X

- Contact Finish
- None: Tin-Plated
- G: Gold-flash
- G3: 3u" Gold
- G10: 10u" Gold
- G15: 15u" Gold
- G30: 30u" Gold




3D VIEW

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W3045LBKV-2xNP-X
- Poles: 04-24P
- Housing Material: PA9T UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin or Gold-Plated
- The Dimension Marked "▼" Must Be Recorded

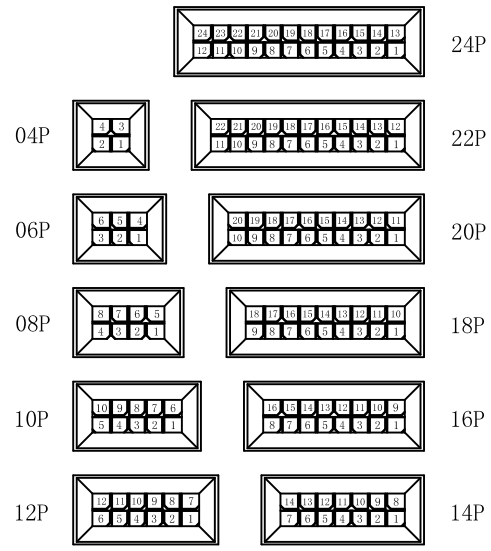

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)		
	A	B	C
04	3.00	13.00	12.00
06	6.00	16.00	15.00
08	9.00	19.00	18.00
10	12.00	22.00	21.00
12	15.00	25.00	24.00
14	18.00	28.00	27.00
16	21.00	31.00	30.00
18	24.00	34.00	33.00
20	27.00	37.00	36.00
22	30.00	40.00	39.00
24	33.00	43.00	42.00

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°
绘图/DR	PH. Duan
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-03-12

XYDZ® 东莞市祥运连接器有限公司 Connectors DongGuan XiangYun Connectors CO.,Ltd		品名 (PART NEME)	Molex 3.00mm 180° Wafer Connector Series	
投影法 Projection		料号 (PART NO)	W3045LBKV-2xNP-X	状态码 C
单位/Unit	MM			
比例/Scale	1:1			
大小/SIZE	A4			
页码/SHEET	1/1			
版本/Rev	A			

版次 REV.	A	新本	2019-03-12	PH. Duan
说明 DESCRIPTION				