

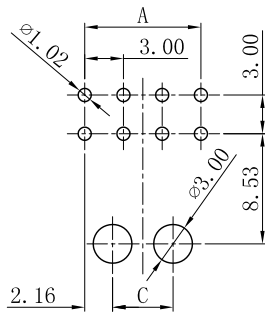
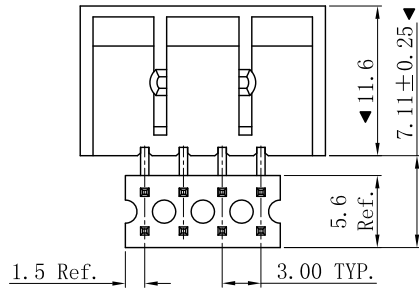




RoHS

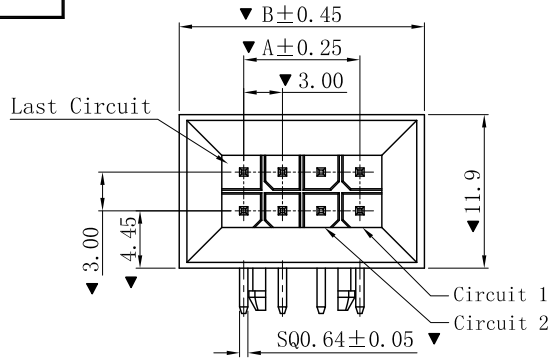

P.C.B LAYOUT: TOP VIEW  
TOLERANCE: ±0.05mm  
Poles: 08P~24P

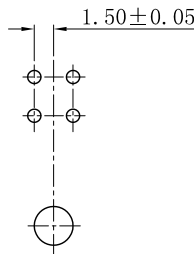

P.C.B LAYOUT: TOP VIEW  
Poles: 04P




P.C.B LAYOUT: TOP VIEW  
Poles: 06P

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045LBKR-2xNP-X
- Poles: 04-24P
- Housing Material: PA9T UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated or Gold-Plated
- The Dimension Marked "▼" Must Be Recorded

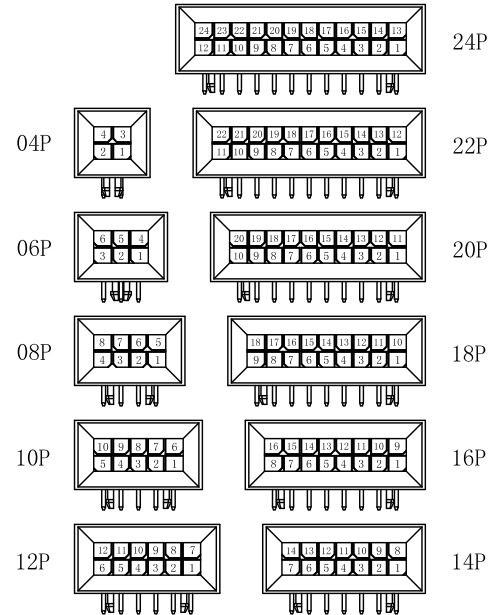

CIRCUIT SIZE LAYOUT

W3045LBKR-2xNP-X  
 Pin Plating:  
 None: Tin-Plated  
 G10: 10u" Gold-Plated  
 G15: 15u" Gold-Plated

Poles	Dimensions (mm)		
	A	B	C
04	3.00	13.00	
06	6.00	16.00	
08	9.00	19.00	4.68
10	12.00	22.00	7.68
12	15.00	25.00	10.68
14	18.00	28.00	13.68
16	21.00	31.00	16.68
18	24.00	34.00	19.68
20	27.00	37.00	22.68
22	30.00	40.00	25.68
24	33.00	43.00	28.68

一般公差  
GENERAL  
TOLERANCE:  
0±0.30  
.0±0.25  
.00±0.20  
.000±0.05  
ANGLE: ±1°

**XYDZ® 东莞市祥运连接器有限公司**  
Connectors DongGuan XiangYun Connectors CO.,Ltd

REV.	DESCRIPTION	DATE	APPRO.
B	新增电镀规格	2019-10-17	PH. Duan
A	新版本	2019-03-12	PH. Duan

绘图/DR	PH. Duan	品名 (PART NEME)	Molex 3.00mm 90° Wafer Connector Series	
审核/CHECK	陈雄军			
核准/APPRO	胡进	料号 (PART NO)	W3045LBKR-2xNP-X	状态码 C
日期/DATE	2019-10-17			