RoHS





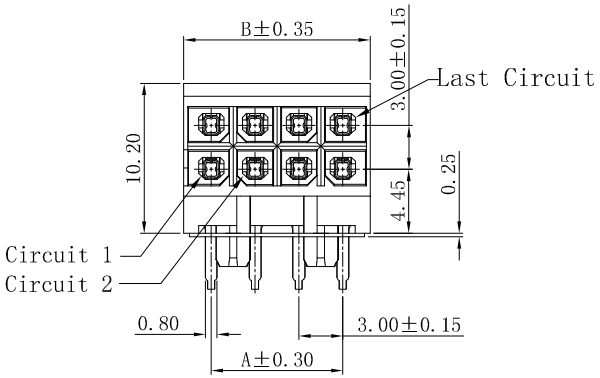

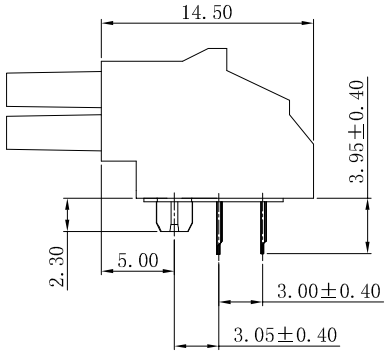

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045LBKGR-2xNP
- Poles: 04-24P
- Housing Material: LCP UL94V-0 Black
- POSITIONING STRIP : MYLAR COLOR NATURAL
- Pin Material: Phosphor Bronze
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded



P.C.B LAYOUT: TOP VIEW
Poles: 04P



P.C.B LAYOUT: TOP VIEW
Poles: 06P



P.C.B LAYOUT: TOP VIEW
Poles: 08P~24P

Poles	Dimensions(mm)		
	A	B	C
04	3.00	6.70	
06	6.00	9.70	
08	9.00	12.70	6.00
10	12.00	15.70	9.00
12	15.00	18.70	12.00
14	18.00	21.70	15.00
16	21.00	24.70	18.00
18	24.00	27.70	21.00
20	27.00	30.70	24.00
22	30.00	33.70	27.00
24	33.00	36.70	30.00

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
A	新版本	2021-08-10	PH.Duan

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2021-08-10

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	Molex3.00mm 90° 喇叭口公座 Wafer Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W3045LBKGR-2xNP 状态码 C
页码/SHEET	1/1		
版本/Rev	A		