RoHS



06, 10, 14 Poles



04, 08, 12, 16 Poles



Only for CKT 06, 10, 14

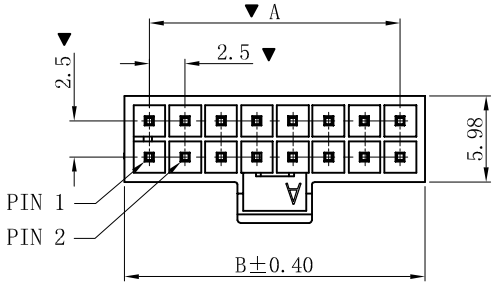

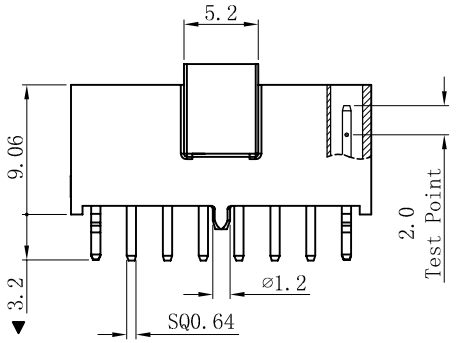

Recommended P.C.B Hole Dimension
Recommended P.C.B Thickness 1.6~2.4mm



Part No:
W2520V-2xNP-X
A: A Key(Black Plastic)
B: B Key(Nature Plastic)

Dimensional Lnformation (mm)

Poles	Dim.A	Dim.B
04P~16P	2.50xNP-2.5	2.50xNP+0.94

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 4A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2520V-2xNP-X
- Poles: 04-16P
- Housing Material: LCP UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

W2520V-2xNP-A

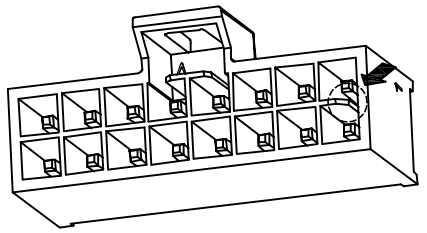

W2520V-2xNP-B

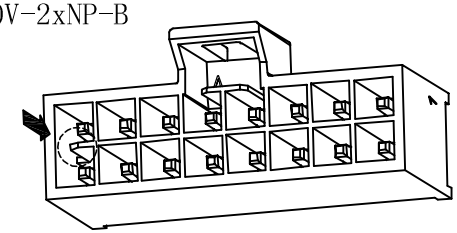

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
A	新版本	2019-11-23	PH.Duan

一般公差 GENERAL TOLERANCE:	.0±0.40 .00±0.25 .000±0.15 ANGLE. ±5°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-11-23

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection		品 名 (PART NEME)	Molex 2.50mm 2xNP 180° Wafer Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	W2520V-2xNP-X
页码/SHEET	1/1		状态码 C
版本/Rev	A		