

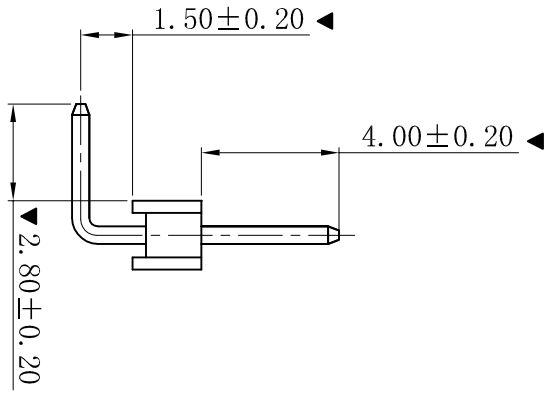
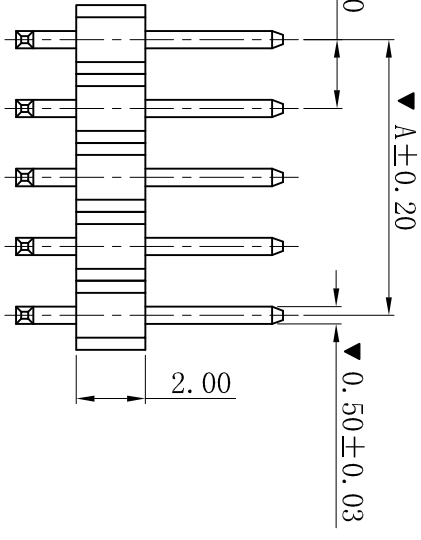


RoHS

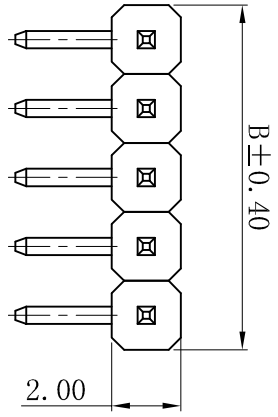

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max

- WAFER**
- Part No.: W2010R-NP
 - Poles : 02-40P
 - Housing Material: PBT UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-Flash
 - The Dimension Marked “▼” Must Be Recorded

| Poles | Dimension (mm) | | Dimension (mm) | |
|-------|----------------|-------|----------------|-------|
| | A | B | A | B |
| 02 | 2.00 | 4.00 | 22 | 42.00 |
| 03 | 4.00 | 6.00 | 23 | 44.00 |
| 04 | 6.00 | 8.00 | 24 | 46.00 |
| 05 | 8.00 | 10.00 | 25 | 48.00 |
| 06 | 10.00 | 12.00 | 26 | 50.00 |
| 07 | 12.00 | 14.00 | 27 | 52.00 |
| 08 | 14.00 | 16.00 | 28 | 54.00 |
| 09 | 16.00 | 18.00 | 29 | 56.00 |
| 10 | 18.00 | 20.00 | 30 | 58.00 |
| 11 | 20.00 | 22.00 | 31 | 60.00 |
| 12 | 22.00 | 24.00 | 32 | 62.00 |
| 13 | 24.00 | 26.00 | 33 | 64.00 |
| 14 | 26.00 | 28.00 | 34 | 66.00 |
| 15 | 28.00 | 30.00 | 35 | 68.00 |
| 16 | 30.00 | 32.00 | 36 | 70.00 |
| 17 | 32.00 | 34.00 | 37 | 72.00 |
| 18 | 34.00 | 36.00 | 38 | 74.00 |
| 19 | 36.00 | 38.00 | 39 | 76.00 |
| 20 | 38.00 | 40.00 | 40 | 78.00 |
| 21 | 40.00 | 42.00 | | 80.00 |

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

| | | | | | | | | |
|----------|--|------------|-----|----------|------------|-----|--|-------------------------------|
| 更新图档 | | 2019-06-03 | 陈雄军 | 更新图档 | 2019-06-03 | 陈雄军 | 0±0.30 -0±0.25 .00±0.20 .000±0.05 | 一般公差 GENERAL TOLERANCE: |
| 修打版本 | | 2015-11-04 | 陈雄军 | 修打版本 | 2015-11-04 | 陈雄军 | ANGLE: ±1 $^{\circ}$ | 绘图/DR |
| 变更图宽格式内容 | | 2013-12-27 | 陈雄军 | 变更图宽格式内容 | 2013-12-27 | 陈雄军 | | 审核/CHECK |
| 新版本 | | 2011-05-24 | 陈雄军 | 新版本 | 2011-05-24 | 陈雄军 | | 批准/APPRO |
| 说明 | | 日期 | 承认 | 说明 | 日期 | 承认 | | 日期/DATE |
| 版次 | | | | 版次 | | | | 日期/DATE |
| REV. | | | | REV. | | | | 日期/DATE |

| | | | | | |
|----------|-----|---------|----|-------------|---------------------------|
| 投影法 | 第一角 | 单位 | MM | 品名 | 杜邦2.00mm 90 $^{\circ}$ 排针 |
| 比例/Scale | 1:1 | 大小/Size | A4 | (PART NAME) | Connector Series |
| 页码/SHEET | 1/1 | 版本/Rev | D | 料号 | W2010R-NP |
| | | | | (PART NO) | 状态码 |