


RoHS



C	Color	Wire size
R	Red	22# AWG
W	White	24# AWG
N	Natural	24# AWG
B	Black	24# AWG
b	Blue	26# AWG
G	Green	26# AWG

F2548C-NP-C

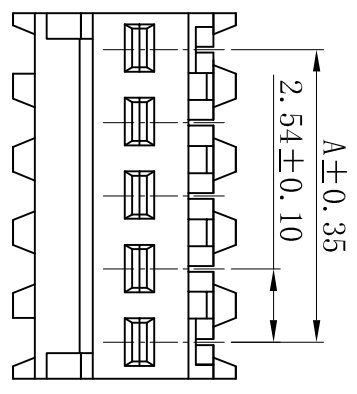

Pin number
Color/Wire size

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 700V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max
- HOUSING
- Part No. : F2548C-NP-C
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-2
 - Terminal Material: Brass. Tin-Plated

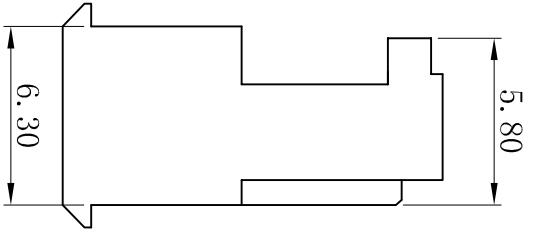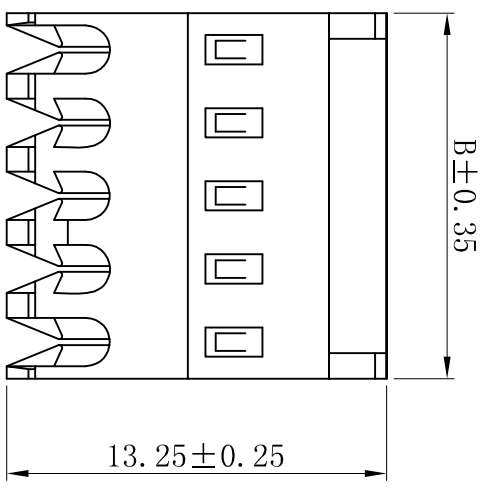

Poles	Dimensions (mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.06
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ±0.30 ±0.25 .00±0.20 .000±0.05 ANGLE: ±1°	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°
C	修订版本	2015-11-04	陈雄军	绘图/DR	胡进
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHKC	陈雄军
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	承认 APPRO.	日期 DATE.	日期/DATE

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection: MM

单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/SHEET: 1/1
版本/Rev: D

品名 (PART NAME): IDC 2.54mm 刺破式 凸台 Connector Series
料号 (PART NO): F2548C-NP-C
状态码: C

1 2 3 4 5 6 7 8 9 10